ZTE KANGXUN TELECOM CO. LTD.

RECIPIENT

SPECIFICATIONS

MODEL	**VG7050EAN SM180003 DJGHPZ**
FREQUENCY	**669.326600 MHz**
SPEC. No.	**H13-036-0B**
DATE	**19th.MAR . 2014**

SEIKO EPSON CORPORATION

8548 Naka-minowa Minowa-machi Kamiina-gun
Nagano-ken 399-4696 Japan

CHECKED M. Oka **/TD Production Engineering Department Manager**

CHECKED T. Adachi **/TD Production Engineering Department Staff**

CHECKED **/TD･CS Quality Assurance Department Manager**

PREPARED S. Sato **/TD･CS Quality Assurance Department Staff**

Application

1) This document is applicable to the Programmable Voltage Controlled Oscillator VG7050EAN.
2) This product is compliant with RoHS Directive.
3) This Product supplied (and any technical information furnished, if any) by Seiko Epson Corporation shall not be used for the development and manufacture of weapon of mass destruction or for other military purposes. Making available such products and technology to any third party who may use such products or technologies for the said purposes are also prohibited.
4) This product listed here is designed as components or parts for electronics equipment in general consumer use. We do not expect that any of these products would be incorporated or otherwise used as a component or part for the equipment, which requires an extra high reliability, such as satellite, rocket and other space systems, and medical equipment, the functional purpose of which is to keep life.

Table of Contents

1. Overview 1
2. Block Diagram 2
3. Pin Assignments 3
   - 3.1. Pin Assignments 3
   - 3.2. Pin Descriptions 3
4. Electrical Characteristics 4
   - 4.1. Absolute Maximum Ratings 4
   - 4.2. DC Characteristics 4
   - 4.3. AC Characteristics 6
   - 4.4. VCXO Control Voltage Input (V_C) 9
   - 4.5. LVPECL 10
   - 4.6. Startup 11
5. Functions 12
   - 5.1. Overview 12
   - 5.2. Setting of the Kv 12
   - 5.3. Setting of the Output Frequency 12
     - 5.3.1. Calculation of the Frequency Setting 12
     - 5.3.2. Reconfiguring Frequency Setting 14
   - 5.4. I^2C interface 15
     - 5.4.1. Connection of I^2C Bus 15
     - 5.4.2. I^2C Bus Protocols Supported by the VG7050EAN 16
     - 5.4.3. START Condition and STOP Condition 16
     - 5.4.4. Byte Format and ACK/NACK 17
     - 5.4.5. Read/Write to Register 17
6. Registers 18
   - 6.1. List of registers 18
   - 6.2. Product Code 0 Register 18
   - 6.3. Product Code 1 Register 18
   - 6.4. Revision Code Register 19
   - 6.5. ID Code 0 Register 19
   - 6.6. ID Code 1 Register 19
   - 6.7. ODIV Register 20
   - 6.8. NINT Register 20
   - 6.9. NFRAC Register 21
   - 6.10. PLL Control Register 22
   - 6.11. KV Register 23
7. Environmental and Mechanical Characteristics 24
8. Electrostatic Discharge (ESD) Sensitivity 25
9. Dimensions 26
10. Device Marking 27

11. Soldering Pattern 28
12. Application Note 29

1. Overview

Programmable Voltage Controlled Oscillator: VG7050EAN is a low jitter programmable VCXO at any frequency. VG7050EAN consists of VCXO, PLL and LVPECL output buffer. Its output frequency is programmable from 50 MHz to 800 MHz with almost 2 ppb resolution.

VCXO supplies stable reference clock to PLL with fundamental tone crystal. Kv of VCXO can be programmed via I^2C interface.

PLL consists of a low jitter fractional-N PLL technology. The components for loop filter are embedded into IC, so no external component is needed.

- Programmable clock output frequency from 50 MHz to 800 MHz
- Frequency setting resolution is around 2 ppb
- Kv is programmable
- Low jitter and high reliability clock source from the fundamental tone internal crystal
- Low jitter and low noise PLL
- One power-up default frequency
- Factory preset device options as shown in Table 1.1
- Embedded resistors and capacitors for oscillator and loop filter for PLL
- I^2C interface
- LVPECL output
- 8-pin ceramic 5 x 7 mm package
- -40 ℃ ~ +85 ℃ ambient operating temperature
- Pb-free / RoHS-compliant

Table 1.1 Factory preset device options

Item	Specification	Note
Positive supply voltage	2.5 V ± 5%	-
Output frequency	669.3266 MHz	Can be reprogrammed via I^2C bus. Once the device is powered down, it will return to its factory-set default setting.
APR	Min. 133 ppm	
OE pin polarity	Active High	-
Output standby type	Hi-Z	-
I^2C I/F Slave address	0x37	-
ID_CODE1 read value	0x01	-
KV register	0x05	Can be reprogrammed via I^2C bus. Once the device is powered down, it will return to its factory-set default setting.

2. Block Diagram


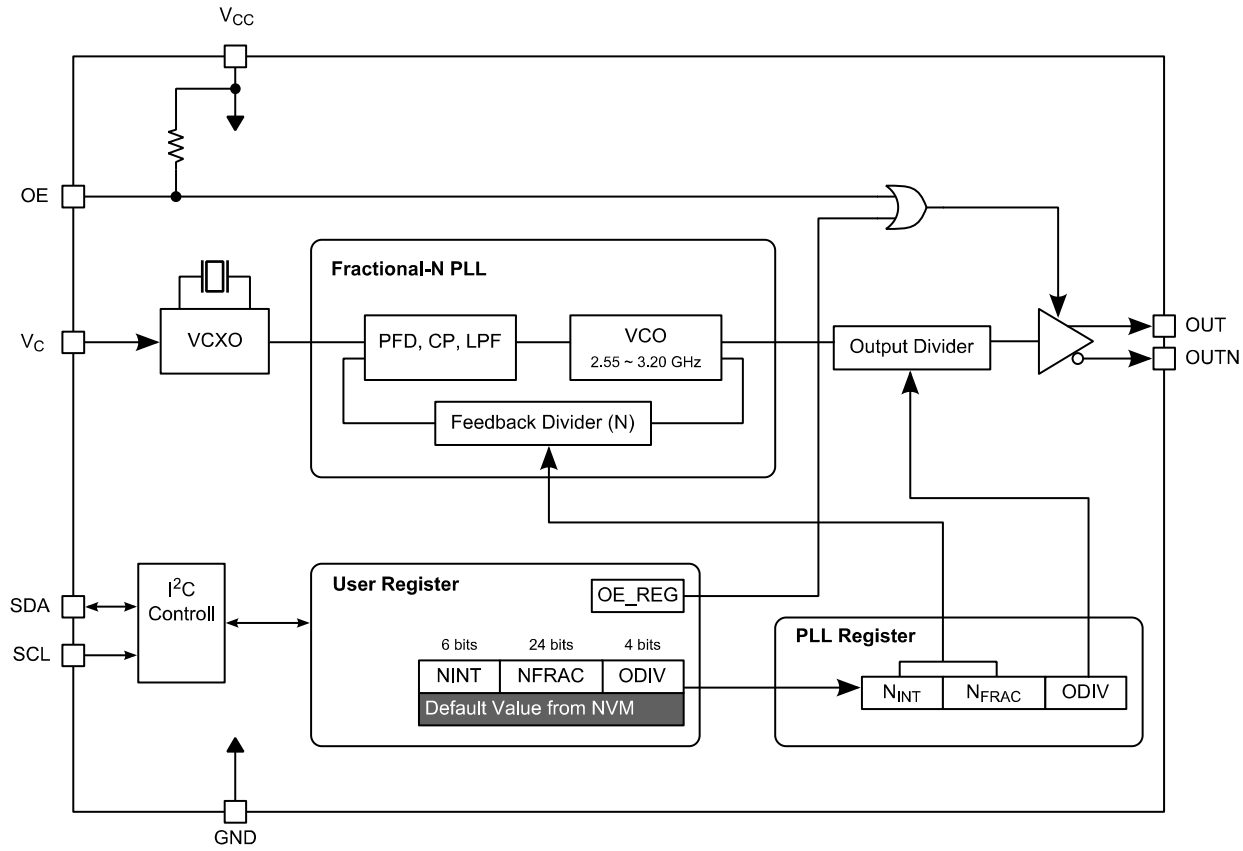


Figure 2.1. VG7050EAN Block Diagram

3. Pin Assignments

3.1. Pin Assignments

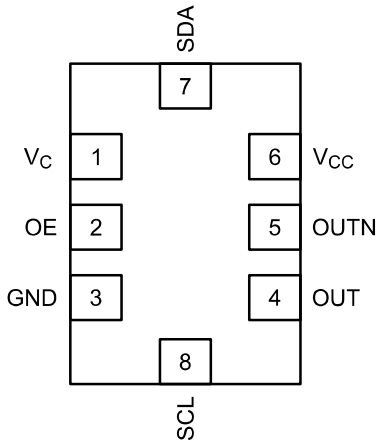

(Top View)

3.2. Pin Descriptions

Table 3.1 Pin Descriptions

No.	Pin Name	Type		Function
1	V_C	Input	-	VCXO Control Voltage Input
2	OE	Input	Pull-up	Output Enable OE Input: OUT, OUTN pin status "H" or Open: Outputs are enabled. "L": High-impedance state
3	GND	Power	-	Negative Power Supply
4	OUT	Output	-	Differential clock output. LVPECL interface levels.
5	OUTN	Output	-	
6	V_{CC}	Power	-	Positive Power Supply
7	SDA*1	Input/Output	-	I^2C Data Input/Output Input: LVCMOS interface levels, Output: Open drain
8	SCL*1	Input	-	I^2C Clock Input

Note: "Pull-up" refers to VG7050EAN internal input resistors.
*Note 1: External pull-up resistor to V_{CC} is necessary.

4. Electrical Characteristics

4.1. Absolute Maximum Ratings

Item	Symbol	Condition	Min.	Typ.	Max.	Units
Supply voltage, V_{CC}	V_{CC}	GND = 0 V	-0.3	-	4.0	V
Pull-up voltage	V_{PU}	SDA, SCL	-0.3	-	4.0	V
Input voltage 1	V_{in1}	GND = 0 V, Input pins except to SDA and SCL	GND - 0.3	-	V_{CC} + 0.3	V
Input voltage 2	V_{in2}	GND = 0 V, SDA, SCL	GND - 0.3	-	4.0	V
Storage temperature	Tstg	Store as bare product	-55	-	+125	℃

Note: Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those listed in the “DC characteristics” or “AC characteristics” is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

4.2. DC Characteristics

Table 4.1. Power Supply, Operating Temperature

GND = 0 V, Ta = -40 ~ +85 ℃

Item	Symbol	Conditions	Min.	Typ.	Max.	Units
Positive supply voltage	V_{CC}	2.5 V option	2.375	2.5	2.625	V
Positive supply current[*1] Output enable mode	I_{CC}	OE = Enable, Outputs terminated with 50 Ω to V_{CC} – 2.0 V	-	-	90	mA
Positive supply current [*1] Output disable mode	$I_{_dis}$	OE = Disable, Output standby type: Hi-Z	-	-	40	mA
Operating temperature	Ta	-	-40	-	+85	℃

Note 1: Guaranteed by design, characterization, and/or simulation only and not production tested.

Table 4.2. Logic I/O

V_{CC} = 2.5 V ± 5%, GND = 0 V, Ta = -40 ~ +85 ℃

Item	Symbol	Conditions	Min.	Typ.	Max.	Units
Pull-up voltage	V_{PU}	SDA, SCL	V_{CC} x 0.7	-	3.630	V
High level input voltage 1	V_{IH1}	OE	V_{CC} x 0.7	-	V_{CC} + 0.3	V
High level input voltage 2	V_{IH2}	SDA, SCL, Pull Up Voltage = V_{PU}	V_{CC} x 0.7	-	3.630	V
Low level input voltage	V_{IL}	SDA, SCL, OE	-0.3	-	V_{CC} x 0.3	V
High level input current	I_{IH}	SDA, SCL, OE	-	-	2	µA
Low level input current 1	I_{IL1}	SDA, SCL	-2	-	-	µA
Low level input current 2	I_{IL2}	OE	-35	-	-	µA
Low level output voltage	V_{OL}	SDA, at 3 mA sink current	0	-	0.4	V
Low level output current	I_{OL}	SDA, V_{OL} = 0.4 V	3	-	-	mA
Pull-up resistor	R_{UP}	OE (Active High)	-	85	-	kΩ
Input Capacitance[*1]	C_{IN}	OE, SDA, SCL	-	5	-	pF
Note 1: Guaranteed by design, characterization, and/or simulation only and not production tested.						


4.3. AC Characteristics

Table 4.3. Output Frequency Characteristics


V_{CC} = 2.5 V ± 5%, GND = 0 V, Ta = -40 ~ +85 ℃

Item	Symbol	Conditions	Min.	Typ.	Max.	Units
Output frequency	f_O	OUT, OUTN	50	-	800	MHz
Internal crystal frequency	f_{XTAL}	-	-	114.144	-	MHz
Frequency reprogramming resolution	M_{RES}	-	2.2	-	2.8	ppb
Frequency tolerance[*1]	f_tol	This parameter includes initial frequency tolerance, temperature, supply voltage variation and 10 years aging[*2] at 25 ℃.	-50	-	+50	10^{-6}
Delta frequency for continuous output[*1]	-	From Center Frequency that is defined by setting NEW_FREQ bit	-500	-	+500	10^{-6}
Setting time for large frequency change[*1]	t_{SET1}	From setting NEW_FREQ bit to output new frequency	-	-	1.5	ms
Setting time for small frequency change[*1]	t_{SET2}	< ±500 ppm from center frequency that is defined by setting NEW_FREQ bit	-	-	100	µs
SSB phase noise[*1, *3]	F_{CN}	f_O = 622.08 MHz, from carrier				
		100 Hz	-	-75.5	-	dBc/Hz
		1 kHz	-	-101.1	-	
		10 kHz	-	-118.9	-	
		100 kHz	-	-121.3	-	
		1 MHz	-	-129.0	-	
		10 MHz	-	-146.7	-	
RMS phase jitter[*1, *3, *4]	t_{PJ}	f_O = 622.08 MHz, Integration range:				
		12 kHz – 20 MHz (OC-48)	-	0.3	-	ps
		20 kHz – 50 MHz	-	0.3	-	
		50 kHz – 80 MHz (OC-192)	-	0.3	-	

Note 1: Guaranteed by design, characterization, and/or simulation only and not production tested.
Note 2: The aging in the frequency tolerance is from environmental tests results to the expectation of the amount of the frequency variation. This doesn't guarantee the product life cycle.
Note 3: f_{XTAL} = 114.144 MHz, Ta = +25 ℃, VCC = 2.5 V, VC = 1.25 V, KV = 0x0
Note 4: The output clock may contain spurious that depends on the settings of fo, $f_{XTAL,}$ PLL and output divider. The RMS jitter may be worse, if the spurious is in integration range of RMS jitter. For more information, please contact us.

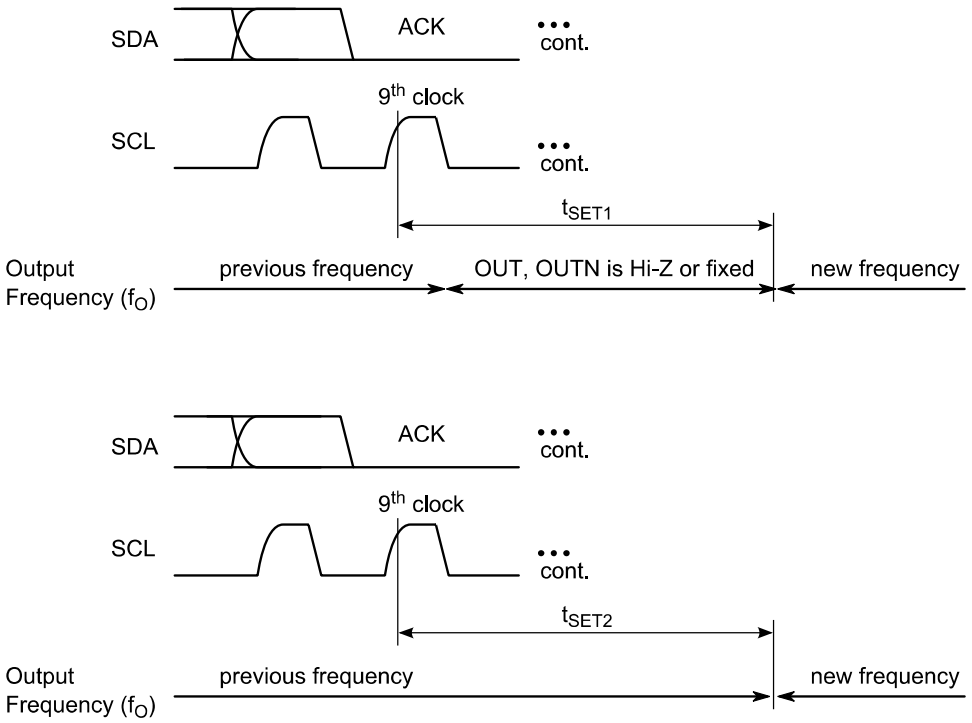

Frequency Change Time

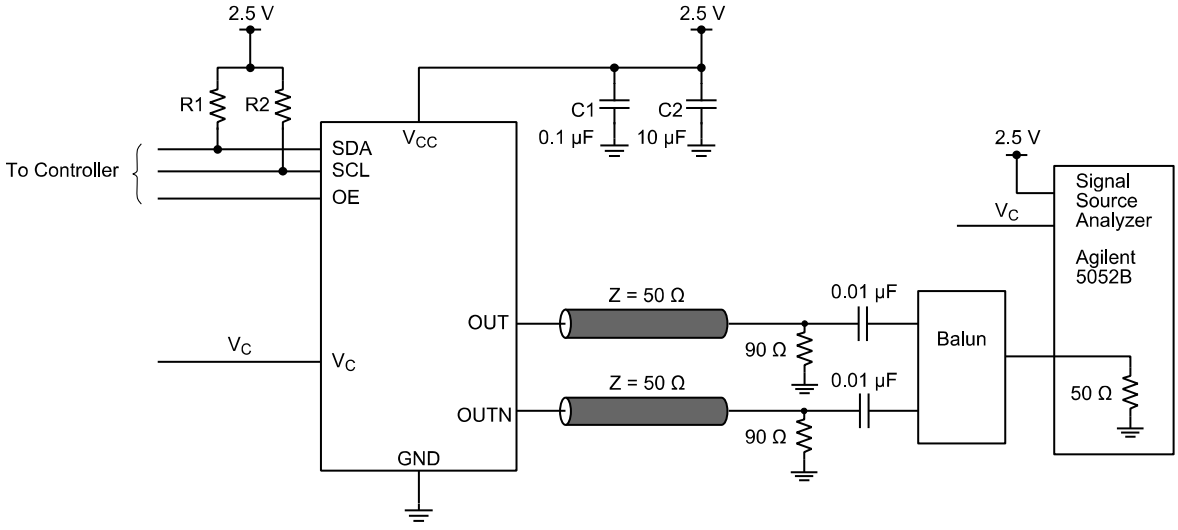


Phase Noise Test Circuit

Table 4.4. Serial Interface

V_{CC} = 2.5 V ± 5%, GND = 0 V, Ta = -40 ~ +85 ℃

Item	Symbol	Conditions	Min.	Typ.	Max.	Units
SCL clock frequency	f_{SCL}	-	-	-	400	kHz
Hold time (repeated) START condition, After this period, the first clock pulse is generated.	$t_{HD;STA}$	-	0.6	-	-	µs
Low period of the SCL clock	t_{LOW}	-	1.3	-	-	µs
High period of the SCL clock	t_{HIGH}	-	0.6	-	-	µs
Set up time for a repeated START condition	$t_{SU;STA}$	-	0.6	-	-	µs
Input data hold time	$t_{HD;DAT}$	-	0	-	-	µs
Output data set-up time	$t_{SU;DAT}$	-	100	-	-	ns
Rise time of both SDA and SCL signals[*1]	t_r	-	-	-	300	ns
Fall time of both SDA and SCL signals	t_f	-	-	-	300	ns
Set up time for STOP condition	$t_{SU;STO}$	-	0.6	-	-	µs
Bus free time between a STOP and START condition	t_{BUF}	-	1.3	-	-	µs
Data valid time	$t_{VD:DAT}$	-	-	-	0.9	µs
Data valid acknowledge time	$t_{VD;ACK}$	-	-	-	0.9	µs
Note 1: Guaranteed by design, characterization, and/or simulation only and not production tested.						

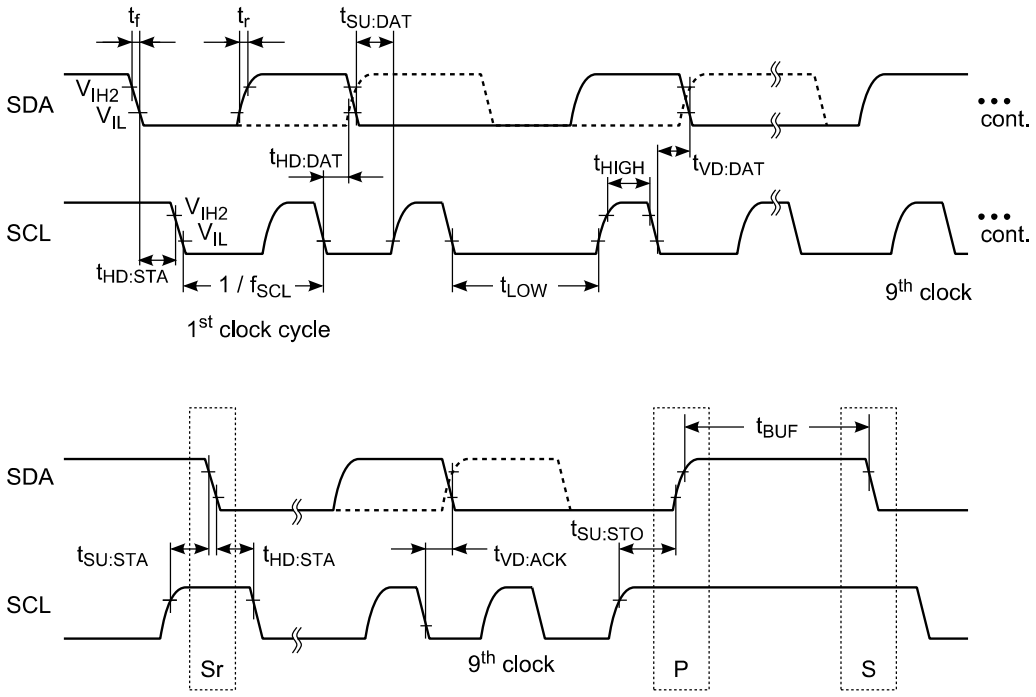

Serial Interface

4.4. VCXO Control Voltage Input (V_C)

Table 4.5. VCXO Control Voltage Input (V_C) Characteristics (1)

V_{CC} = 2.5 V ± 5%, GND = 0 V, Ta = -40 ~ +85 ℃

Item	Symbol	Conditions	Min.	Typ.	Max.	Units
Control voltage tuning range	V_C	-	0	-	V_{CC}	V
V_C input resistance	R_{IN}	DC Level	5	-	-	MΩ
Nominal Control Voltage	VC_{NOM}	-	-	1.25	-	V
Frequency Change Polarity		-	Positive slope			-

Table 4.6. VCXO Control Voltage Input (V_C) Characteristics (2)

V_{CC} = 2.5 V ± 5%, GND = 0 V, Ta = -40 ~ +85 ℃


Item	Symbol	Conditions		Min.	Typ.	Max	Units
Control voltage linearity	f_lin	BSL, V_{CC} = 2.5 V, V_C = 0.25 V ~ 2.25 V		-	-	±10	%
Modulation bandwidth	BW	±3 dB, reference input: 1 kHz		10	-	-	kHz
Absolute pull range [*1]	APR	V_{CC} = 2.5 V, V_C = 0.0 V ~ 2.5 V,, f_{XTAL} = 114.144 MHz	KV Register				
			0x0	±226	-	-	ppm
			0x1	±212	-	-	
			0x2	±193	-	-	
			0x3	±172	-	-	
			0x4	±153	-	-	
			0x5	±133	-	-	
			0x6	±112	-	-	
			0x7	±93	-	-	
			0x8	±77	-	-	
			0x9	±57	-	-	
			0xA	±38	-	-	
			0xB	±19	-	-	
Note: Guaranteed by design, characterization, and/or simulation only and not production tested.							

4.5. **LVPECL**


Table 4.7. LVPECL

V_{CC} = 2.5 V ± 5%, GND = 0 V, Ta = -40 ~ +85 ℃


Item	Symbol	Conditions	Min.	Typ.	Max	Units
Output load condition	L_PECL	Outputs terminated with 50 Ω to V_{CC} – 2.0 V				-
Rise time[*1]	t_R	-	-	-	400	ps
Fall time[*1]	t_F	-	-	-	400	ps
Symmetry[*1] (duty cycle)	SYM	-	45	50	55	%
High level output voltage	V_{OH}	-	V_{CC} – 1.025	V_{CC} – 0.95	-	V
Low level output voltage	V_{OL}	-	-	V_{CC} – 1.7	V_{CC} – 1.62	V
OE disable delay time[*1]	t_{PXZ}	-	-	-	100	ns
OE enable delay time[*1]	t_{pZX}	-	-	-	10	µs
Note: OUT and OUTN are not used as single end. Note 1: Guaranteed by design, characterization, and/or simulation only and not production tested.						

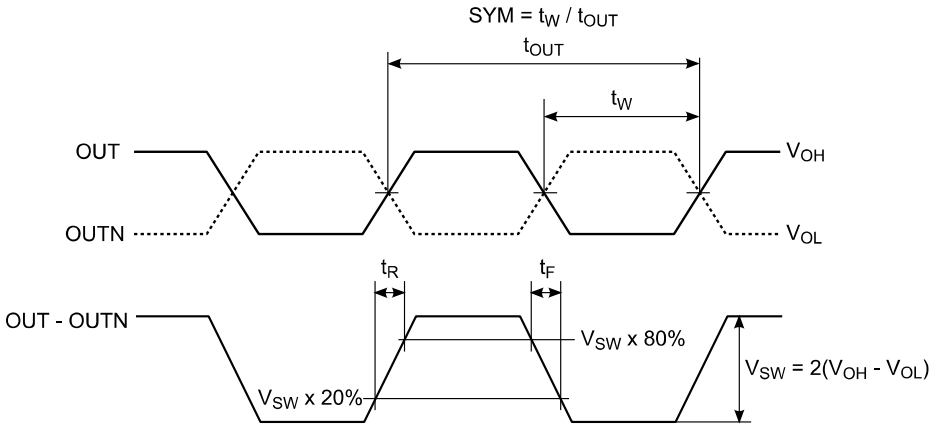

Output Rise/Fall Time, Symmetry (duty cycle)

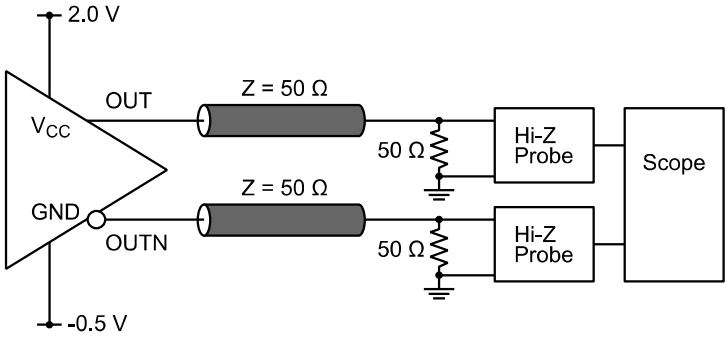

Output AC Test Circuit

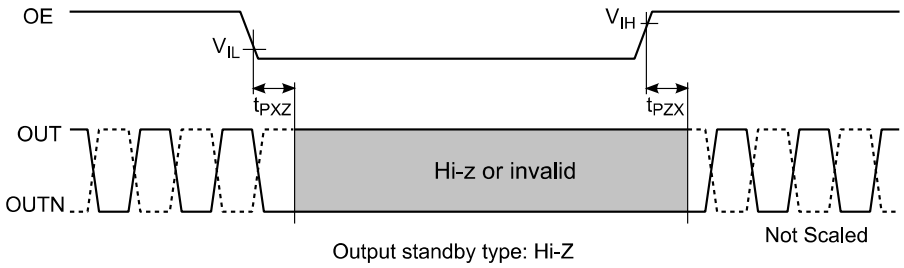


4.6. **Startup**

Table 4.8. Startup

V_{CC} = 2.5 V ± 5%, GND = 0 V, Ta = -40 ~ +85 ℃

Item	Symbol	Conditions	Min.	Typ.	Max	Units
V_{CC} ramp rate[*1]	R_{VCC}	V_{CC} from 0 V to $V_{CC\ MIN}$.	5×10^{-6}	-	3	s
Startup time[*2]	t_str	-	-	-	5	ms
I^2C I/F enable time[*2]	t_{I2CEN}	-	-	-	5	ms
Note 1: V_{CC} ramp must be monotonic. Note 2: Guaranteed by design, characterization, and/or simulation only and not production tested.						

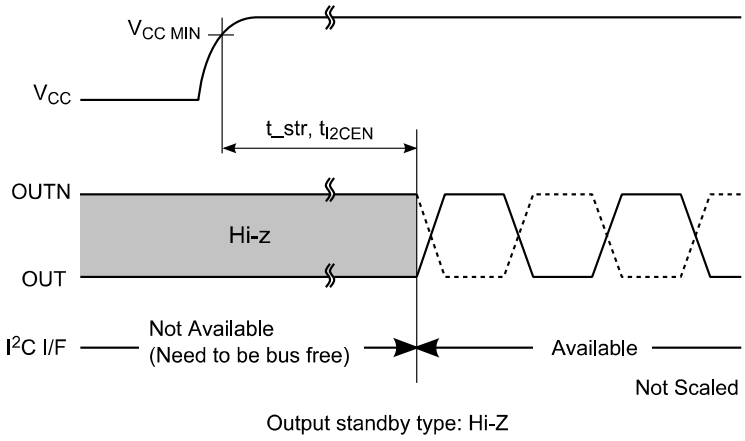

Start-Up Time

5. Functions

5.1. Overview

The VG7050EAN has a VCXO, PLL and output buffer unit. The VCXO unit is composed of a fundamental mode crystal that generates stable reference clock for PLL. Kv of VCXO can be programmed via I^2C interface. For best phase noise performance, Kv can be selected the lowest setting that meets the requirements of the application. The output frequency is determined by the feedback divider and the output divider. The feedback divider can offer not only integer setting that achieves lower jitter, but also fractional setting that provides frequency in ppb resolution.

The device's default output frequency and Kv are set at the factory and can be reprogrammed via I^2C bus. Once the device is powered down, it will return to its factory-set default setting.

5.2. Setting of the Kv

The VG7050EAN has Voltage Control function in its crystal oscillation circuit. The Kv value, pull range sensitivity of the V_C function, is the factory default value when the device is powered on. It can be reprogrammed by setting the KV.KV register through I^2C bus.

Table 5.1. Setting of the Kv

Register	Setting	Kv *
KV.KV	0xC ~ 0xF	Forbidden
	0xB	Min
	…	…
	0x0	Max

***Please refer to the Kv values for the Table 4.6**

5.3. Setting of the Output Frequency

5.3.1. Calculation of the Frequency Setting

The output frequency (f_O) is determined by the VCO frequency (f_{VCO}) and the output divider (ODIV). This is shown:

$$f_O = \frac{f_{VCO}}{ODIV} \quad \textbf{(1)}$$

The VCO frequency must be from 2.55 GHz to 3.20 GHz. Base on the relation between this limit and the formula (1), ODIV is calculated from the f_O as shown in Table 5.2.

The VCO frequency is determined by the reference frequency (f_{REF}) from the VCXO and the feedback divider (N). The feedback divider (N) consists of both a 6-bit integer portion (N_{INT}) and a 24-bit fractional portion (N_{FRAC}) and provides the means for high-resolution frequency generation. The VCO frequency is calculated by:

$$\begin{aligned} f_{VCO} &= f_{REF} \times N \\ &= f_{REF} \times \left(N_{INT} + \frac{N_{FRAC}}{2^{24}} \right) \end{aligned} \quad \textbf{(2)}$$

Table 5.2. f_O and ODIV

f_O [MHz]	ODIV	ODIV.ODIV register setting
50 ~ 57	56	0xF
53 ~ 67	48	0xE
64 ~ 80	40	0xD
80 ~ 100	32	0xC
91 ~ 114	28	0xB
106 ~ 133	24	0xA
128 ~ 160	20	0x9
159 ~ 200	16	0x8
182 ~ 229	14	0x7
213 ~ 267	12	0x6
255 ~ 320	10	0x5
319 ~ 400	8	0x4
364 ~ 457	7	0x3
425 ~ 533	6	0x2
510 ~ 640	5	0x1
638 ~ 800	4	0x0

The output frequency (f_O) is shown:

$$f_O = \frac{f_{VCO}}{ODIV} = f_{REF}\frac{\left(N_{INT} + \frac{N_{FRAC}}{2^{24}}\right)}{ODIV} \quad \textbf{(3)}$$

For example if the reference frequency (f_{REF}) is 114.144 MHz and the output frequency is 120MHz, ODIV is fixed to “24” from the Table 5.2. The setting of N, N_{INT}, N_{FRAC} is calculated:

$$N = N_{INT} + \frac{N_{FRAC}}{2^{24}} = \frac{f_{OUT} \times ODIV}{f_{REF}} = \frac{120.0 \times 10^6 \times 24}{114.1444444 \times 10^6} = 25.231188535690308 \quad \textbf{(4)}$$

$$N_{INT} = floor(N) = floor(25.231188535690308) = 25 \quad \textbf{(5)}$$

$$N_{FRAC} = (N - N_{int}) \times 2^{24} = (25.231188535690308 - 25) \times 2^{24} = 0.231188535690308 \times 2^{24} \cong 3878700 = 0x3B2F2C \quad \textbf{(6)}$$

Depending on the fo, the ODIV may become two values.


For example if the fo is 380 MHz, ODIV can be 7 or 8. Even if either of the ODIV values is selected, the same fo can be gained by setting NINT and NFRAC but phase noise included in the output signal become different. Please evaluate the performances fully in your actual usage environment and select the ODIV.

N_{FRAC} is a 24-bit value. By setting 6 bit of N_{INT} and 20 bit of N_{INT} frequency resolution is 10 ppb order. The lower 4 bit of the rest of the N_{FRAC} corresponds to the setting of the frequency in 1ppb order. By setting these values, the output frequency is changed very small, but the spurious of the output signal may change significantly. Please evaluate the performances fully in your actual usage environment and fix the lower 4 bit of the N_{FRAC}.

5.3.2. **Reconfiguring Frequency Setting**

The VG7050EAN has a “user register” and a “PLL register”. The user register stores ODIV, NINT and NFRAC. It can be reprogrammed at any time when I^2C bus is available. The PLL register is connected directly to the PLL. When the device is powered on, the default value programmed in the non-volatile memory is automatically fetched to the user register, and the PLL register is updated with it.

The PLL register is also updated with the user register, by writing PLL_CTRL.NEW_FREQ or PLL_CTRL.SML_CHG register. This flow is shown in Figure 5.1.

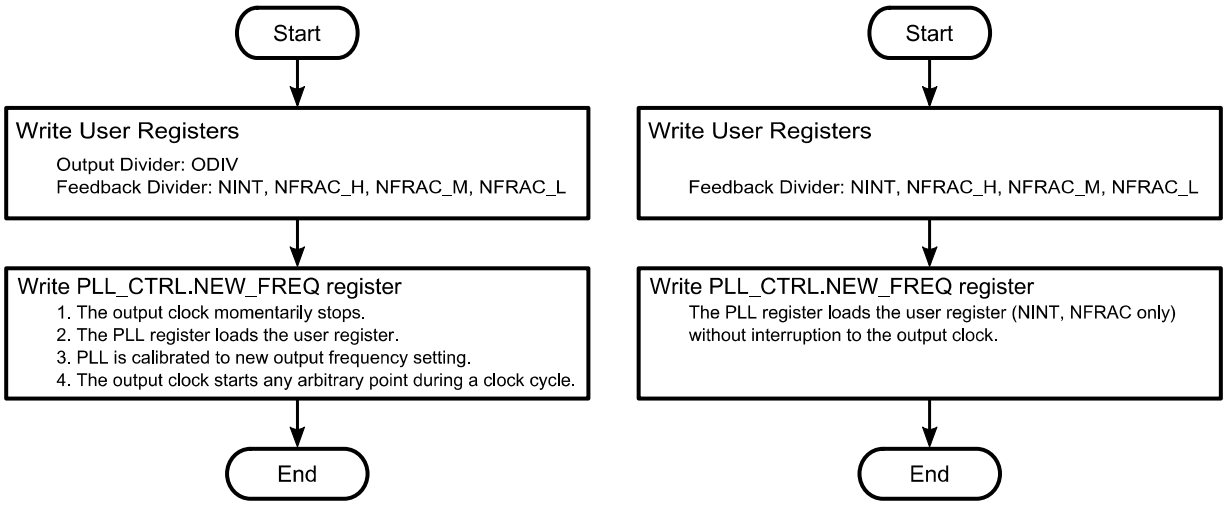

(a) Reconfiguring the output clock for any change in frequency

(b) Reconfiguring the output clock for a small change in frequency

Figure 5.1. Reconfiguring Frequency Setting

First, ODIV, NINT, and NFRAC in the user register need to be changed. For details of the user register please refer to the chapter 6.

Next by writing 1 in the PLL_CTRL.NEW_FREQ register or PLL_CTRL.SML_CHG register, frequency setting can be forwarded from the user register to the PLL register. As a result, output signal of frequency (f_O) is updated. Difference between the PLL_NEW_FREQ register and the PLL_SML_CHG is shown in Table 5.3

Table 5.3. Updating the frequency setting

No	Register	PLL calibration	Output signal	Frequency pull range
1	PLL_CTRL.NEW_FREQ	Y	Momentarily stopped and start over after PLL is optimized	50 MHz to 800 MHz
2	PLL_CTRL.SML_CHG	N	Continuous output	Within the ±500 ppm window

As 1 is written in the PLL_CTRL.NEW_FREQ register, the output clock is momentarily stops and PLL is calibrated to new output frequency. After the calibration, output clock starts at any arbitrary point during a clock cycle. This method has no limitation in frequency change range and provides lower jitter. This also establishes a new center frequency. Circuitry receiving a clock from the VG7050EAN that is sensitive to glitches or runt pulses may have to be reset once this process is complete.

For output clock frequency changes less than ±500 ppm from the center frequency configuration, PLL_CTRL.SML_CHG register is available. By writing this register as 1, NINT and NFRAC in the user register are transferred to PLL register and the output frequency is updated without interruption to the output clock. Since the PLL is not calibrated, jitter might be increased. It is not guaranteed that the output frequency is in the frequency range defined by the old and new output frequency.

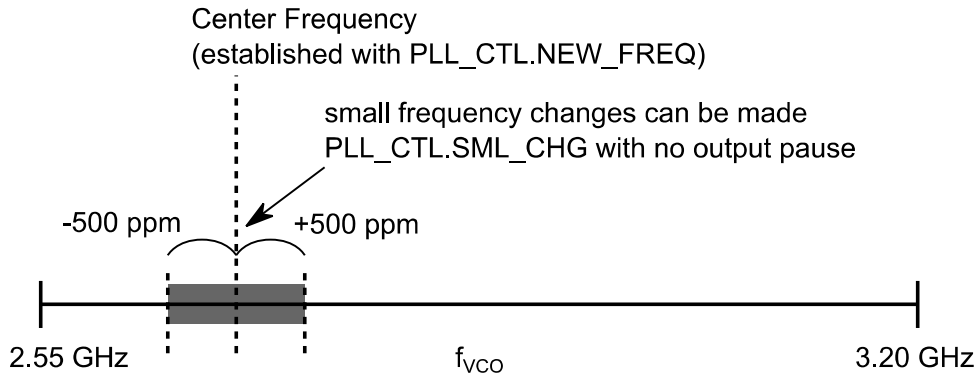


Figure 5.2. VCO frequency range

5.4. I²C interface

5.4.1. Connection of I²C Bus

The VG7050EAN can be used as a slave device of I²C bus. The I²C bus is composed of serial data line (SDA) and serial clock (SCL). The lines need to be both pulled up by external resistors. Electric level of the pull up resistor need to be above the Vcc so these are recommended to be pulled up to the Vcc. Also slave address of the slave devices on the I²C bus must be unique.

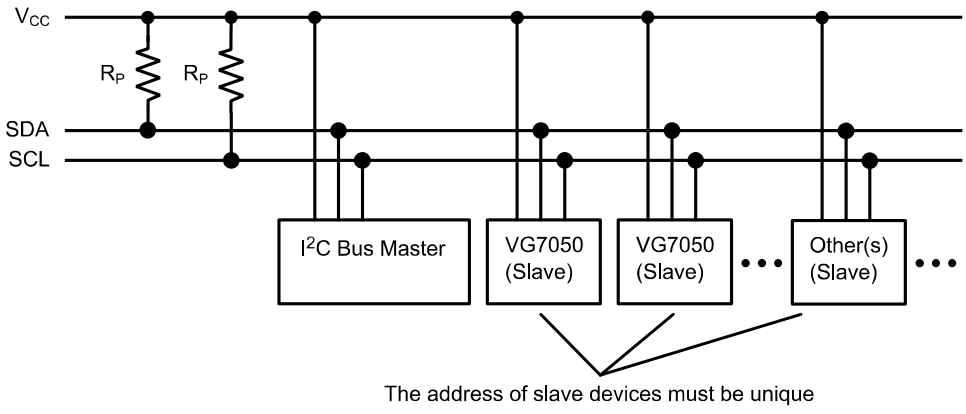


Figure 5.3. Connection of I²C bus

5.4.2. I^2C Bus Protocols Supported by the VG7050EAN

I2C bus protocols that can be supported by the VG7050EAN are shown in the below Table 5.4.

Table 5.4. I^2C bus protocols supported by the VG7050EAN

Feature	VG7050EAN
START condition	✓
STOP condition	✓
Acknowledge	✓
Clock stretching	n/a
7-bit slave address	✓
10-bit slave address	n/a
General Call address	n/a
Software Reset	n/a
Device ID	n/a

n/a = not applicable

5.4.3. START Condition and STOP Condition

Data communication on the I^2C bus starts by START condition (S). The START condition means that SDA changes from “H” to “L” when SCL is at “H”. When the START condition occurs, I^2C bus becomes busy.

Data communication on the I^2C bus can be terminated by STOP condition (P). The STOP condition means that SDA changes from “L” to “H” when SCL is at “H”. When the STOP condition occurs, I^2C bus becomes free.

When I^2C bus is busy, instead of STOP condition START condition can be generated, which is called repeated START condition (Sr). The I^2C bus maintains busy status. If the START or repeated START condition is received, I^2C interface circuit of the VG7050EAN is always reset, even if these START conditions are not positioned according to the proper format.

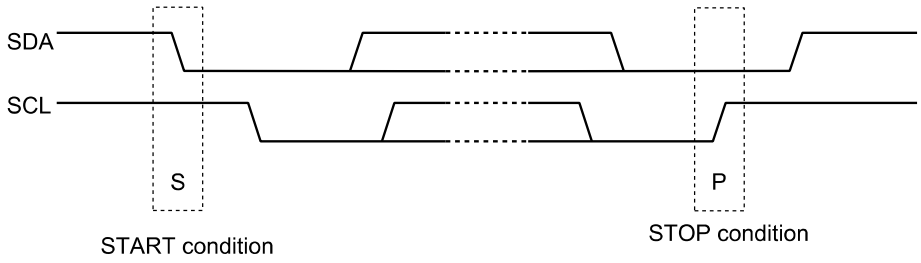


Figure 5.4. START and STOP condition

5.4.4. **Byte Format and ACK/NACK**

Data transmission and reception on I^2C is done in a unit of 8 bit = 1 byte. Each byte is followed by acknowledge bit. Data is transmitted by MSB first. Including acknowledge bit all SCL pulses are generated by Master.

The Acknowledge signal (ACK: A) is defined as follows: the transmitter (master transmitter or slave transmitter) releases the SDA line during the acknowledge clock pulse so the receiver can pull the SDA line “L” and it remains stable “L” during the “H” period of this clock pulse. When SDA remains “H” during this ninth clock pulse, this is defined as the Not Acknowledge signal (NACK: $\overline{A}$).

5.4.5. **Read/Write to Register**

Procedure of Read/Write to register is shown in the below Figure 5.5. The VG7050EAN can Read/Write single or multi byte data. The VG7050EAN slave address is shown in Table 1.1.

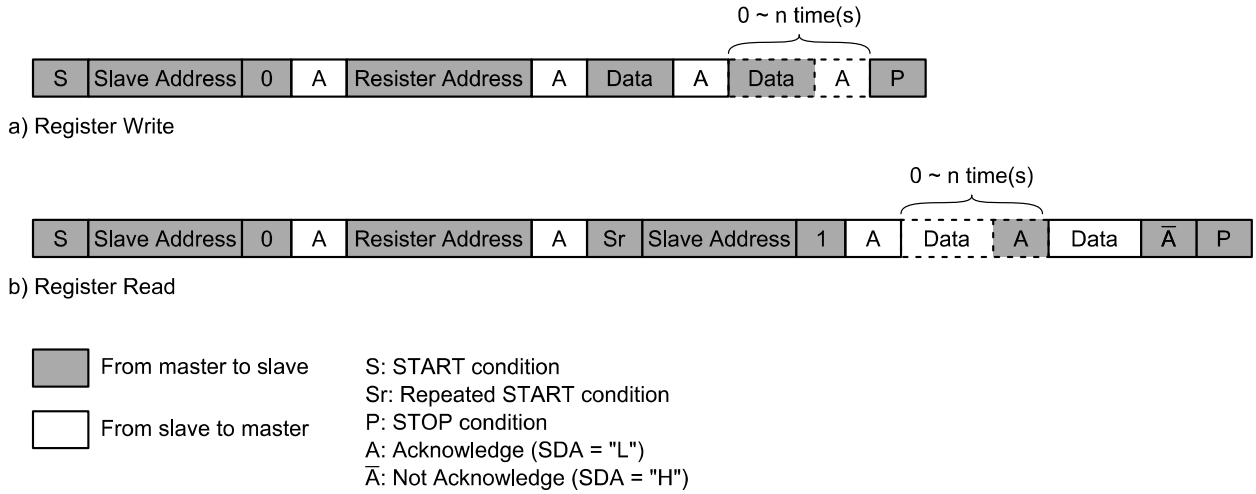


Figure 5.5. Read/Write from/to register by I^2C bus

6. Registers

6.1. List of registers

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x00	P_CODE0	0x46 (Ascii 'F', Read Only)							
0x01	P_CODE1	0x41 (Ascii 'A', Read Only)							
0x02	REV	0x01 (Read Only)							
0x03	ID_CODE0	0x01 (Read Only)							
0x04	ID_CODE1	-	ID (Read Only)						
0x10	ODIV	-	-	-	-	ODIV			
0x11	NINT	-	-	NINT					
0x12	NFRAC_H	NFRAC_H							
0x13	NFRAC_M	NFRAC_M							
0x14	NFRAC_L	NFRAC_L							
0x15	PLL_CTRL0	OE_REG	-	-	-	VCTUNE_DIS	NEW_FREQ	SML_CHG	NVM_RESTORE
0x50	PLL_CTRL1	OE_REG	-	-	-	VCTUNE_DIS	NEW_FREQ	SML_CHG	NVM_RESTORE
0x5A	KV	-	-	-	-	KV			

Note: Please do not write values in the addresses that are not mentioned in this list. Please write 0 in the bit that is not defined.

6.2. Product Code 0 Register

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x00	P_CODE0	P_CODE							
Type		R/O							
Default		0	1	0	0	0	1	1	0

Bit	Name	Function
7:0	P_CODE	**Product code (0x46)** Ascii Code 'F'

6.3. Product Code 1 Register

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x01	P_CODE1	P_CODE							
Type		R/O							
Default		0	1	0	0	0	0	0	1

Bit	Name	Function
7:0	P_CODE	**Product code (0x41)** Ascii Code 'A'

6.4. Revision Code Register

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x02	REV	REV							
Type		R/O							
Default		0	0	0	0	0	0	0	1

Bit	Name	Function
7:0	REV	**Revision code** 0x01

6.5. ID Code 0 Register

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x03	ID_CODE0	ID							
Type		R/O							
Default		0	0	0	0	0	0	0	1

Bit	Name	Function
7:0	ID	**ID code** 0x01

6.6. ID Code 1 Register

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x04	ID_CODE1	-	ID						
Type		-	R/O						
Default		-	See Table 1.1						

Bit	Name	Function
7	Reserved	Always read as 0.
6:0	ID	**ID code** Lower 7 bit value of the parameter designator (SM180003). See Table 1.1

6.7. **ODIV Register**

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x10	ODIV	-	-	-	-	ODIV			
Type		-	-	-	-	R/W			
Default		-	-	-	-	NVM			

Bit	Name	Function
7:4	Reserved	Please write 0 at all the times.
3:0	ODIV	**Division ratio of output divider** 0x0: 4 / 0x4: 8 / 0x8: 16 / 0xC: 32 0x1: 5 / 0x5: 10 / 0x9: 20 / 0xD: 40 0x2: 6 / 0x6: 12 / 0xA: 24 / 0xE: 48 0x3: 7 / 0x7: 14 / 0xB: 28 / 0xF: 56

6.8. **NINT Register**

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x11	NINT	-	-	NINT					
Type		-	-	R/W					
Default		-	-	NVM					

Bit	Name	Function
7:6	Reserved	Please write 0 at all the times.
5:0	NINT	**Integer portion of the feedback divider (N_{INT})**

Setting		Description
0x00 ~ 0x11,	0d ~ 17d	This setting shall not be configured
0x12	18d	N_{INT} = 18
...	...	...
0x20	32d	N_{INT} = 32
0x21 ~ 0x3F	33d ~ 63d	This setting shall not be configured

6.9. **NFRAC Register**

Address	Register Name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x12	NFRAC_H	NFRAC[23:16]							
0x13	NFRAC_M	NFRAC[15:8]							
0x14	NFRAC_L	NFRAC[7:0]							
Type		R/W							
Default		NVM							

Bit	Name	Function
7:0	NFRAC[23:16] NFRAC[15:8] NFRAC[7:0]	**Fractional portion of the feedback divider (N_{FRAC})** E.g. Setting in case N_{FRAC} is 0x123456 NFRAC_H = 0x12 NFRAC_M = 0x34 NFRAC_L = 0x56

6.10. **PLL Control Register**

Address	Register Name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x15 0x50	PLL_CTRL0 PLL_CTRL1	OE_REG	-	-	-	VCTUNE_DIS	NEW_FREQ	SML_CHG	NVM_RESTORE
Type		R/W	-	-	-	R/W	R/W	R/W	R/W
Default		0	-	-	-	0	0	0	0

PLL_CTRL0 and PLL_CTRL1 is an address shared register.

Bit	Name	Function
7	OE_REG	**Output enable register function** LVPECL output buffer is enable when OE pin or this register is set as 1/High as shown below table. LVPECL output buffer OE pin status: H or Open / L OE_REG value 1: Enable / Enable OE_REG value 0: Enable / Disable
6:4	Reserved	Please write 0 at all the times.
3	VCTUNE_DIS	**VC function (VCXO)** 0: VC function is valid 1: VC function is invalid
2	NEW_FREQ	**New frequency applied** By writing 1, frequency setting configured in user register is forwarded to PLL register and output frequency is updated accordingly. This bit is automatically cleared once change of the output frequency and PLL calibration is completed. Note: Please refer to the item 5.3.2 for details of frequency change by this bit.
1	SML_CHG	**New frequency applied (small change in frequency)** By writing 1, frequency setting configured in user register is forwarded to PLL register and output frequency is updated accordingly. This bit is automatically cleared once change of the output frequency is done. Note: Please refer to the item 5.3.2 for details of frequency change by this bit.
0	NVM_RESTORE	**Restore user register from NVM** By writing 1, default value of user register is restored from non-volatile memory (NVM). This bit is automatically cleared once the register restore is done. Note: PLL register is not updated only by writing to this bit. In order to initialize the user register and the PLL register (= output frequency) at the same time, please write 0x05 to PLL_CTRL register (NEW_FREQ bit and NVM_RESTORE bit is written as 1).

6.11. KV Register

Address	Register name	Bit							
		Bit7	Bit6	Bit5	Bit4	Bit3	Bit2	Bit1	Bit0
0x5A	KV	-	-	-	-	KV			
Type		-	-	-	-	R/W			
Default		-	-	-	-	NVM (See Table 1.1)			

Bit	Name	Function
7:4	Reserved	Please write 0 at all the times.
3:0	KV	**Kv setting of VCXO** Please refer to electrical characteristics spec (Table 4.6) for relation between setting and KV.


7. Environmental and Mechanical Characteristics

Seiko Epson evaluation condition: Evaluated by the following examination items and conditions.

No.	Item	Specifications*1		Test condition
		Frequency tolerance*2	Electrical characteristics	
1	High temperature bias*3	±10 x10^{-6}	Satisfy specifications in chapter 4 after test	+85 ºC, V_{CC}/V_C max × 1000 h
2	High temperature storage*3	±10 x10^{-6}		+125 ℃ × 1000 h
3	Low temperature storage*3	±10 x10^{-6}		-55 ℃ × 1000 h
4	High temp. humidity bias*3	±10 x10^{-6}		+85 ℃ × 85 %RH × 1000 h
5	Temperature cycle*3	±10 x10^{-6}		-55 ℃ ⇔ +125 ℃ 30 min. at each temp. 100 cycles
6	Resistance to soldering heat	±10 x10^{-6}		For conventional reflow soldering furnace Ref. IPC/JEDEC J-STD-020D.1 (3 times)
7	Vibration	±5 x10^{-6}		10 Hz ~ 85 Hz, amplitude 1.5 mm 85 Hz~2000 Hz 20 G 20 min/cycle, 12 h (4 h x 3 directions)
8	Shock	±5 x10^{-6}		Peak acceleration: 1000 G, 3 direction x 3 times
9	Leakage	1 × 10^{-9} Pa•m^3/s Max		Test by Helium leak detector

*1 Each test is independent.
*2 Magnitude of the frequency change that is measured at 2 ~ 24 hours later after test.
*3 The test has been taken after pre-conditioning, and leaving for 24 hours at room temperature, then the initial value is measured. Pre-conditioning: reflow 3 times (Same condition of Resistance to soldering heat test)


- Convection reflow profile (Ref. IPC/JEDEC J-STD-020D)

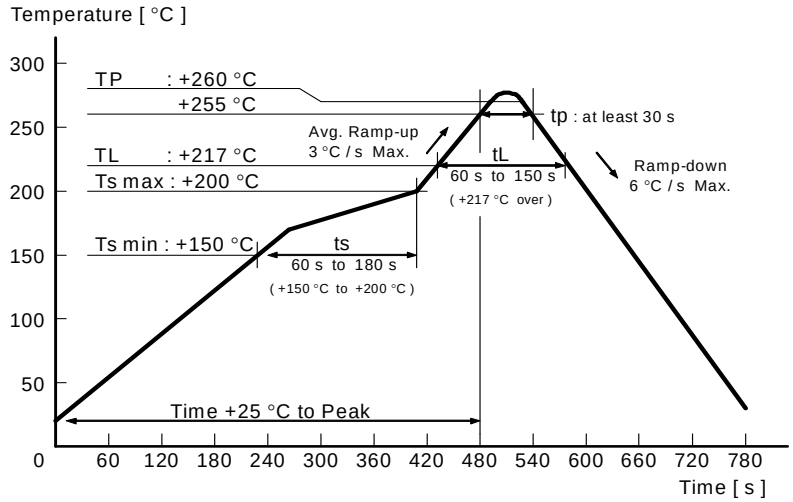

8. Electrostatic Discharge (ESD) Sensitivity


Item	Value	Test Condition
HBM	>2000 V	IEC 60749-26 Ed. 2.0:2006 (b) 100 pF, 1.5 kΩ, 3 times
MM	>200 V	IEC 60749-27 Ed. 2.0:2006 (b) 200 pF, 0 Ω, 1 time

9. Dimensions

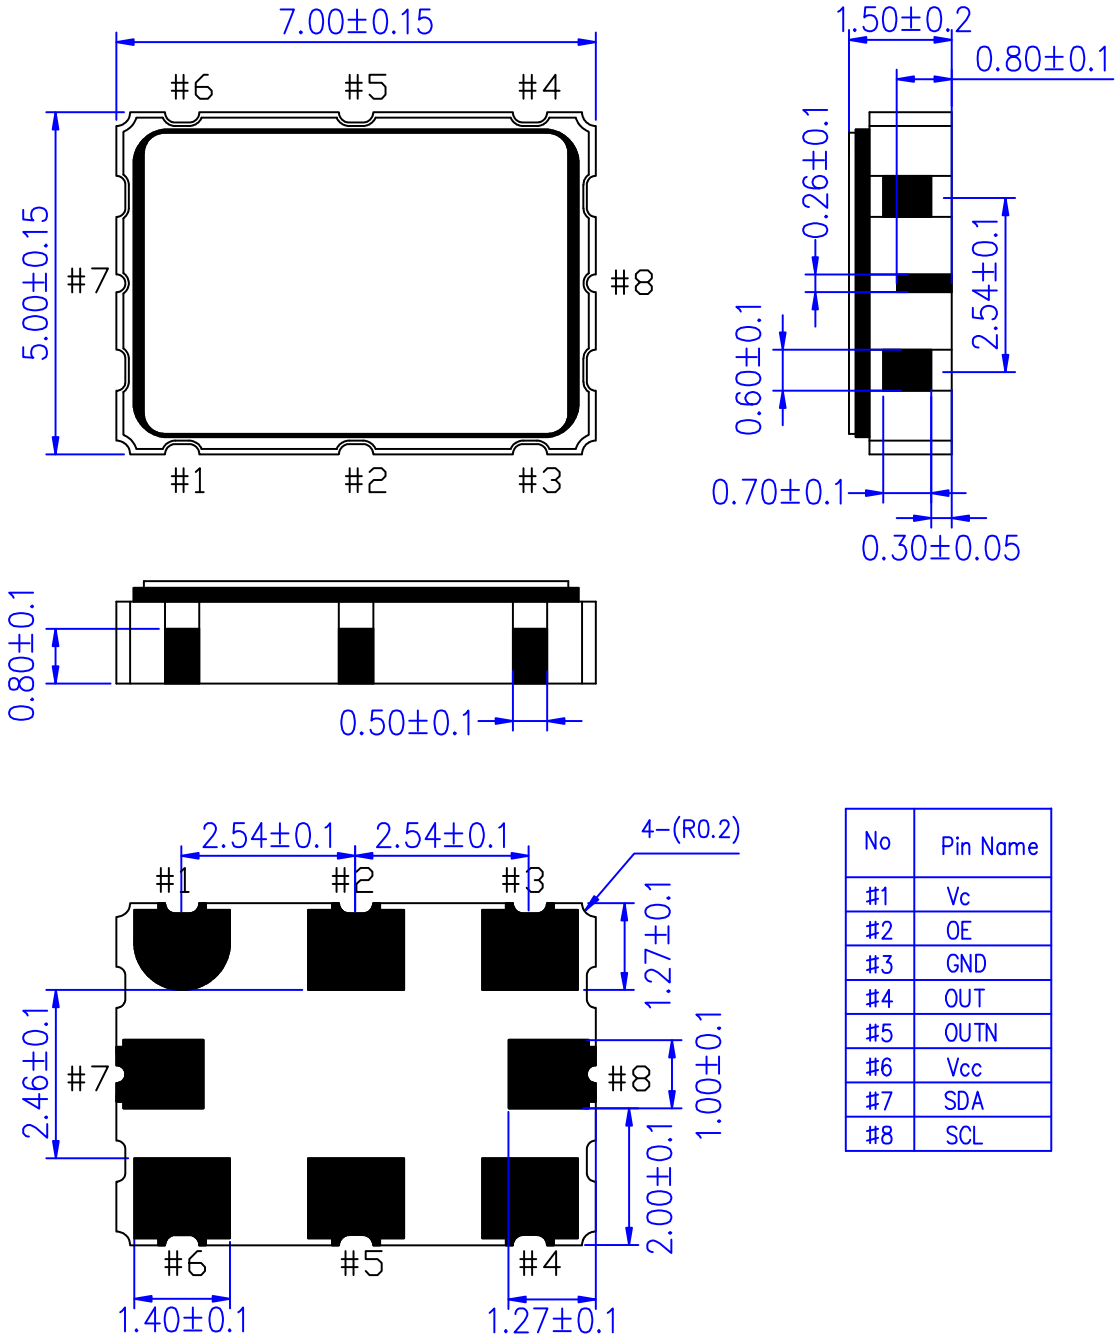

No	Pin Name
#1	Vc
#2	OE
#3	GND
#4	OUT
#5	OUTN
#6	Vcc
#7	SDA
#8	SCL


10. Device Marking

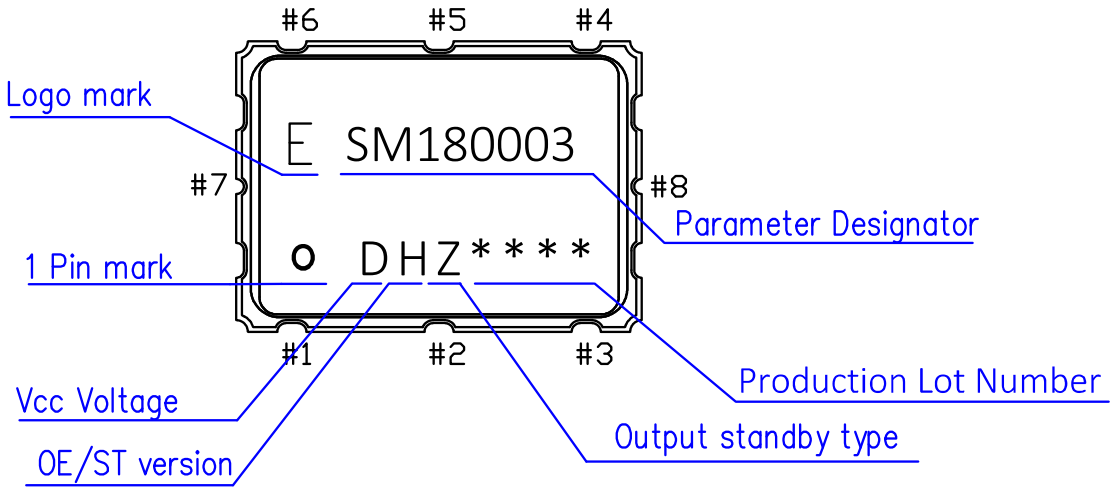

- The above marking layout shows only marking contents and their approximate position, not actual font, size and exact position.

11. Soldering Pattern

Example of patterning design indicated as follows. In an actual design, please consider mounting density, the reliability of soldering, etc. and check whether performance is optimal.

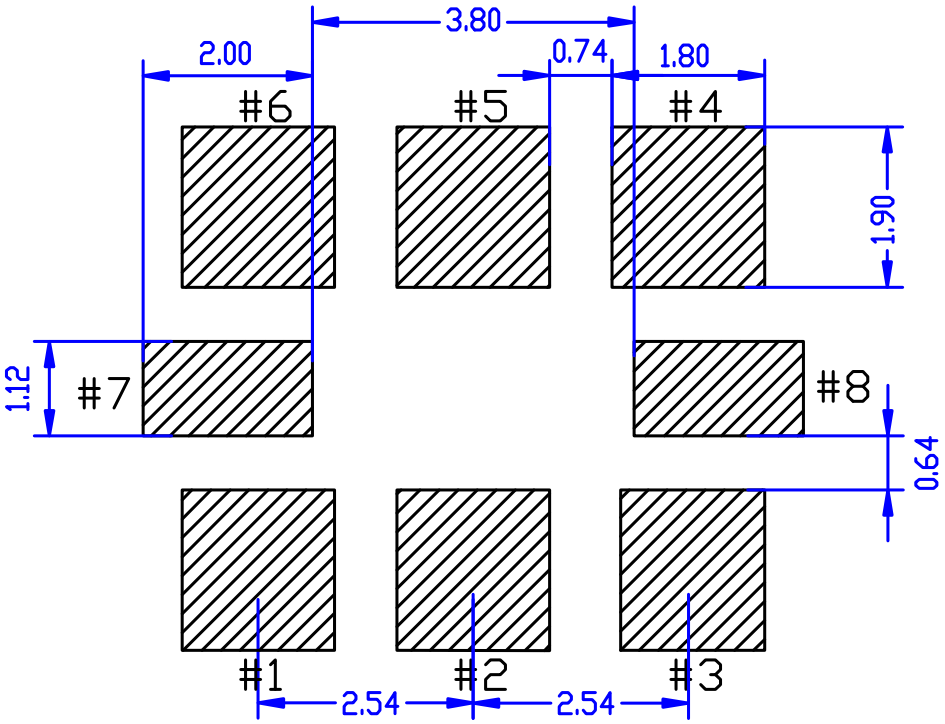

12. Application Note

1. This device contains a crystal resonator, so please do not expose to excessive shock or vibration. The internal crystal resonator might be damaged in case that too much shock or vibration is produced mechanically. Be sure to check your machine condition in advance.
2. This device is made with C-MOS IC. Please take necessary precautions to prevent damage due to electrostatic discharge.
3. We recommend to use and store under room temperature and normal humidity to secure frequency accuracy and prevent moisture.
4. We will announce the discontinuance and switch to our successor before six months or more.
5. Recommendation reflow times are less than 3 times.

   When there was a soldering error, please do alteration with a soldering iron. In this case, the iron ahead is equal to or less than +350 ºC and asks within 5 s.

   In case that this device is reflow soldered on the back side of your circuit board, please carefully verify the device is properly secured to prevent coming detached from card.


Soldering method

Soldering method	Good or No good
Reflow soldering (top side)	Good
Reflow soldering (back side)	Please carefully verify the device is properly secured to prevent coming detached from card.
Solder pot (static solder pot/flow solder pot)	No good
Iron soldering	Good


6. Ultrasonic cleaning can be used on this product, however, since the oscillator might be damaged under some conditions, please exercise caution in advance.
7. Protection against periodically mechanical vibration

   While there is any given shock or mechanical vibration periodically to crystal products, such as, a cooling fan, a piezo sounder, a piezo buzzer, and a speaker to crystal products, output frequency and amplitude can be changed. Especially the quality of telecommunication equipment could be affected by this phenomenon. Although Epson's crystal products are designed to minimize the effect of mechanical vibration, we recommend checking them in advance.
8. The metal part of the surface (metal cap) is connected to GND #3 pin. Please take necessary precautions to prevent short circuit to GND by contact with the metal cap.

9. Side leads as shown below are connected to IC internally. Therefore be careful for short or a fall of insulation resistance.

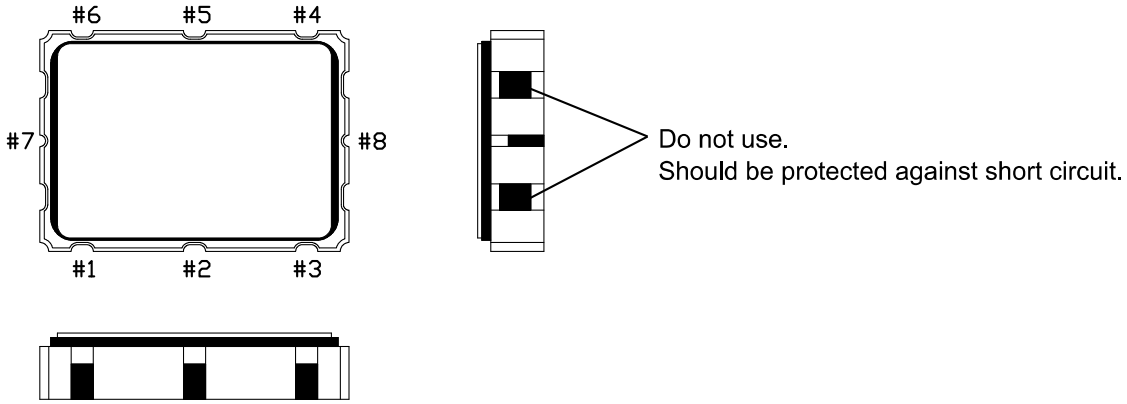

10. V_{CC} and GND pattern shall be as large as possible so that high frequency impedance shall be small.
11. Seiko Epson doesn't recommend to power on from intermediate electric voltage or extreme fast power on. Those powering conditions may cause no oscillation or abnormal oscillation.
12. Please design the output lines by characteristic impedance 50 Ω and try to make the output lines as short as possible. A long output line may cause irregular output. Other high level signal lines may cause incorrect operation, so please do not place high-level signal line close to this device.
13. If OE (Active High), SDA or SCL pin is not used, please connect them to V_{CC}. In order to suppress surge, resister may be used for OE pin.
14. If output pin is connected to the ground when supply voltage is applied to product, the internal elements can be destroyed. So please use the products that always have connection with load resistance.
15. As with any high speed analog circuitry, the power supply pins for VG7050EAN are vulnerable to noise. In order to achieve optimum jitter performance, the 0.1 µF and 10 µF capacitor as shown below is required. These capacitors should be placed as close to Vcc (#3 pin) as possible. It is also recommended that the capacitors are placed on the device side of the PCB. To achieve best performance, it is recommended to place the filter composing devices. Please see next page.

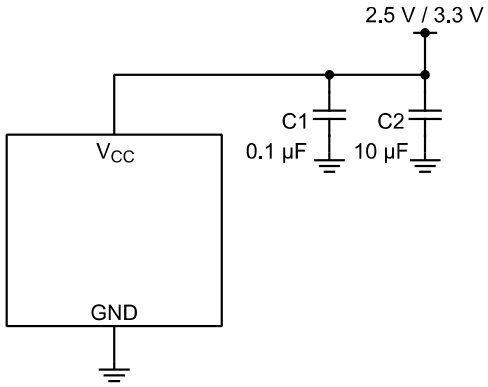


■ Example of VG7050EAN schematic layout

This figure shows an example of this product's application schematic.

As with any high speed analog circuitry, the power supply pins for VG7050EAN are vulnerable to noise. In order to achieve optimum jitter performance, power isolation with filter device is required for power supply pins.

In order to achieve best performance of the power isolation filter, it is recommended that the filter composing devices is placed on the device side of the PCB as close to the power pins as possible. The component value of this filter is just an example, it may have to be adjusted.

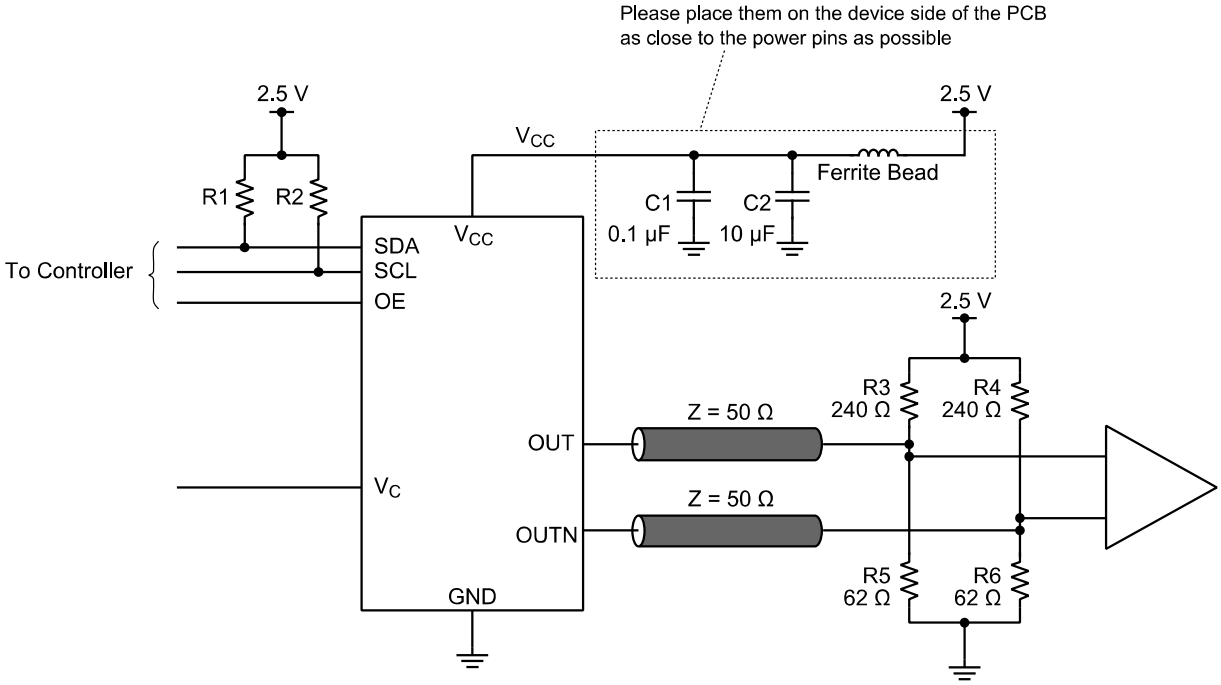

TAPING SPECIFICATION

I. Application

This document is applicable to VG-45**CA / VG7050E*N / SG-77****

Ⅱ. Contents

Item No	Item	Item
[1]	Taping specification	1 to 2
[2]	Inner carton	3
[3]	Shipping carton	4
[4]	Marking	
[5]	Quantity	
[6]	Storage environment	

[1] Taping specification

(1) Tape dimensions

Material of the carrier tape : PS conduct


Material of the top tape : PET

(2) Reel form

Material of the reel : PS conduct

(3) Taping packing

Depends on Figure 1

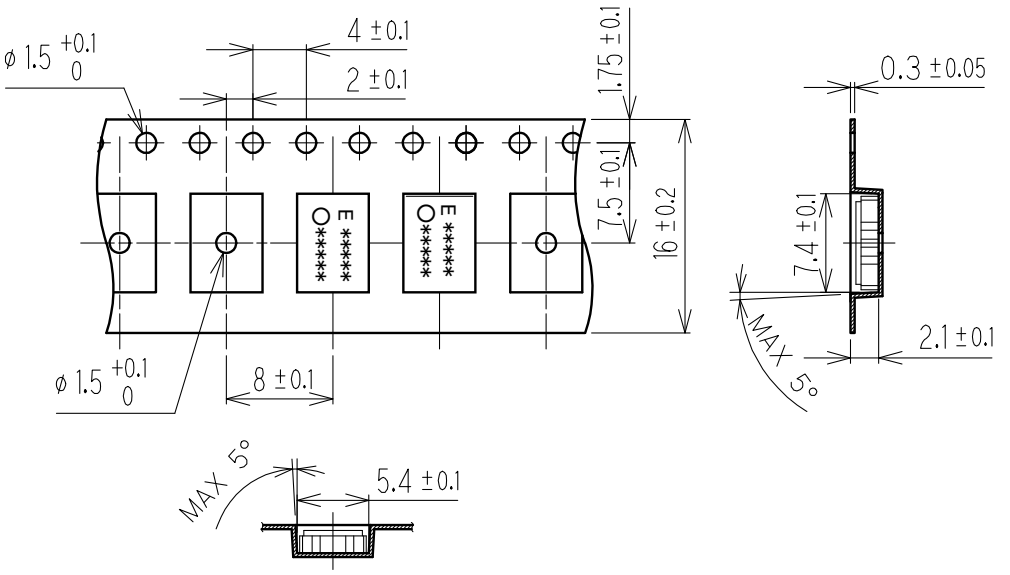

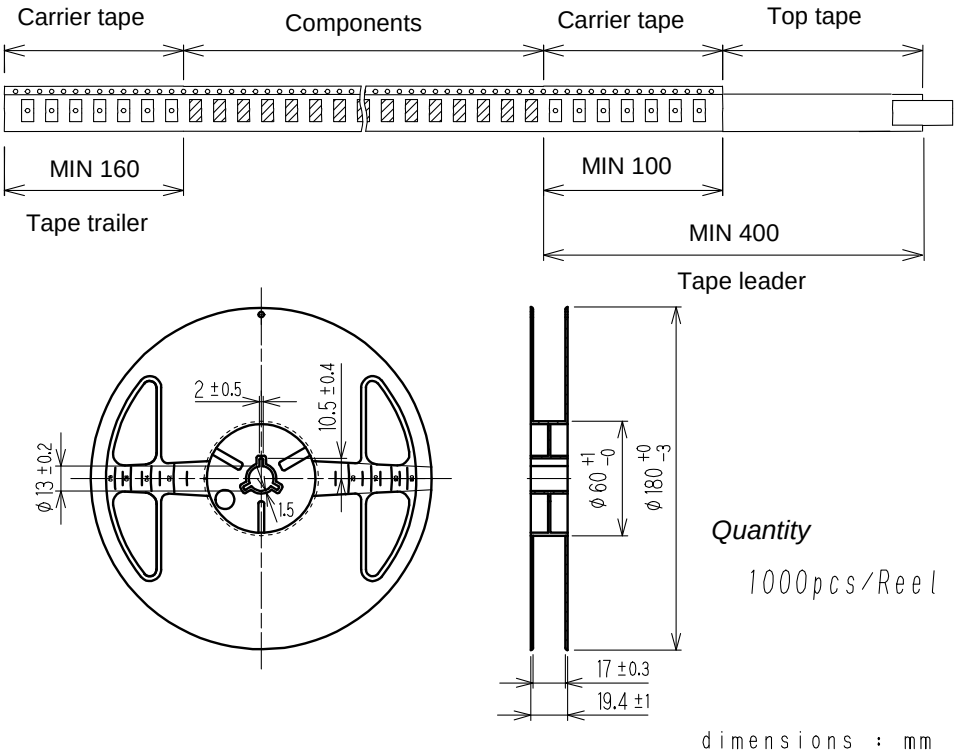



Figure 1 taping

[2] Inner carton

(1) Sticks label on to the reel.

(2) Pack reels into the antistatic bag. And seal the antistatic bag.

(3) Sticks label on the Exterior box
Box up products that are lagged with bentonite without moving. Then seal the box.

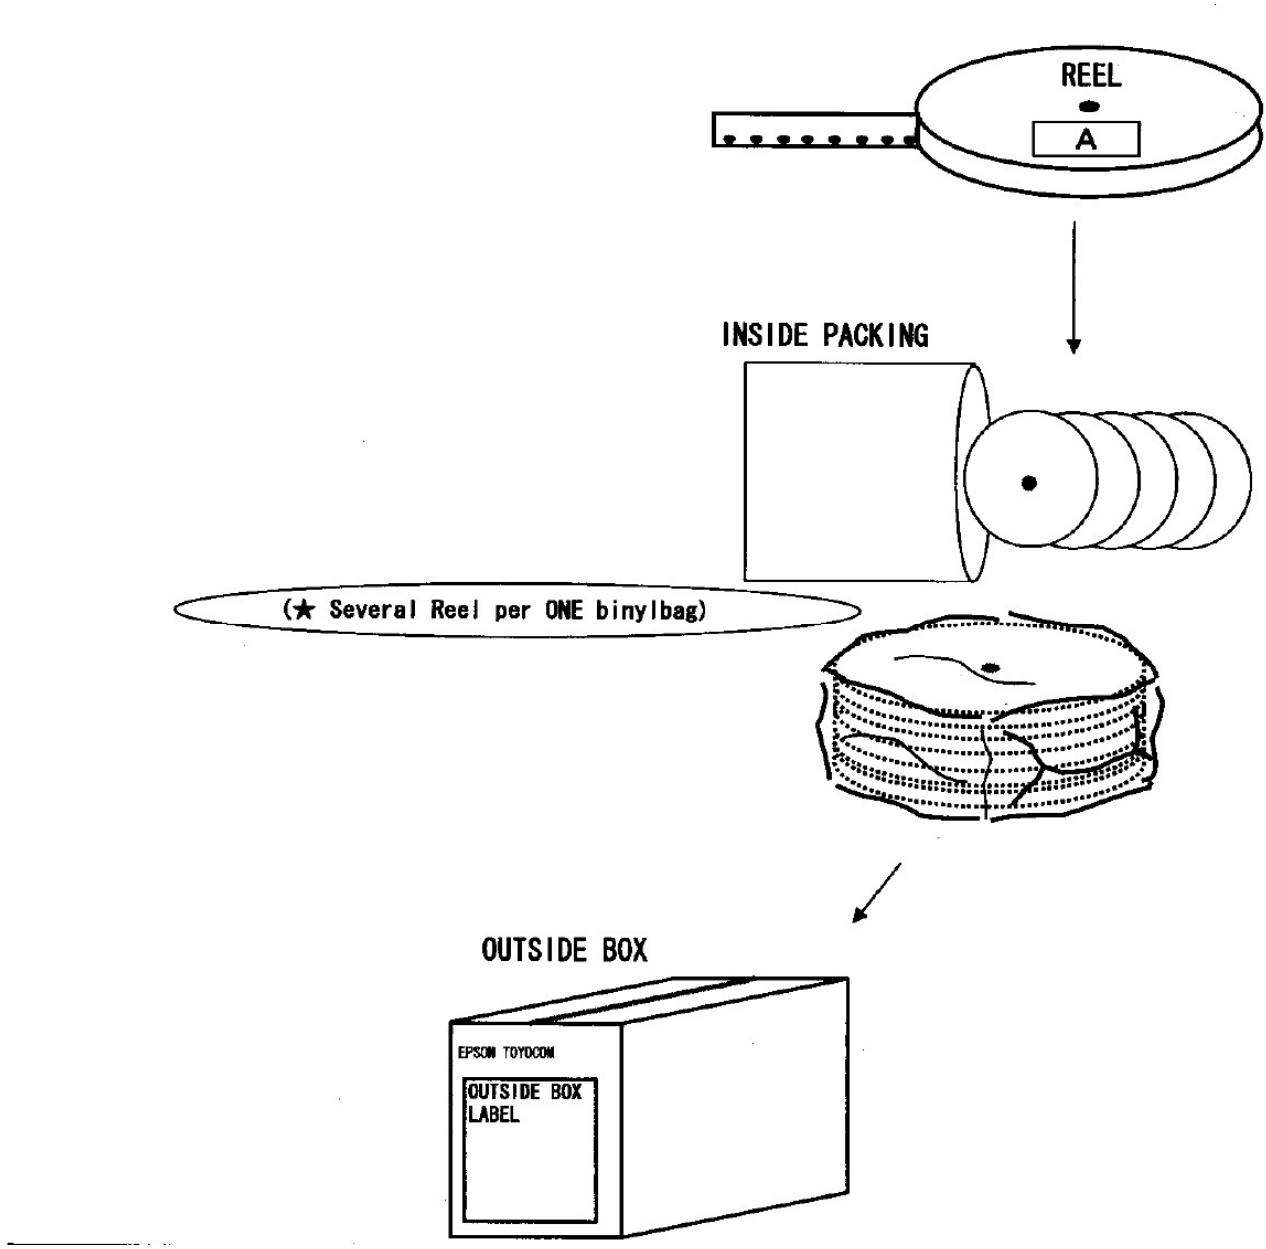

[3] Marking

1) Reel label

Label is put on the reel

Item

(1) Parts No.
(2) P/O
(3) Parts name Frequency
(4) LF(Pb free)
(5) Order No.
(6) Quantity
(7) Lot No.
(8) epsontoyocom's No.
(9) Shipment date

2) Shipping carton marking

・Shipping carton marking shall consist of :

1) Parts name
2) Quantity

[4] Quantity

・1000 pcs./reel

[5] Storage environment

(1) To storage the reel at 15℃ to 35℃, 25%RH to 85%RH of humidity.
(2) To open the packing just before using.
(3) Not to expose the sun.
(4) Not to storage with some erosive chemicals.
(5) Nothing is allowed to put on the reel or carton to prevent mechanical damage.

[6] Handling

(1) To handle with care to prevent the damage of tape, reel and products.
(2) Please do not have one side of the reel alone.
There is unusually a thing that comes off from an inside wick according to handling.