

Emboss Carrier Tape (SMD Type Crystal Resonators)

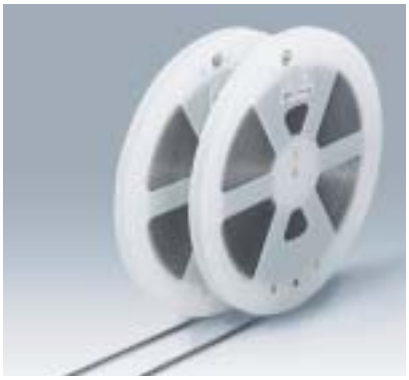


<Tape>

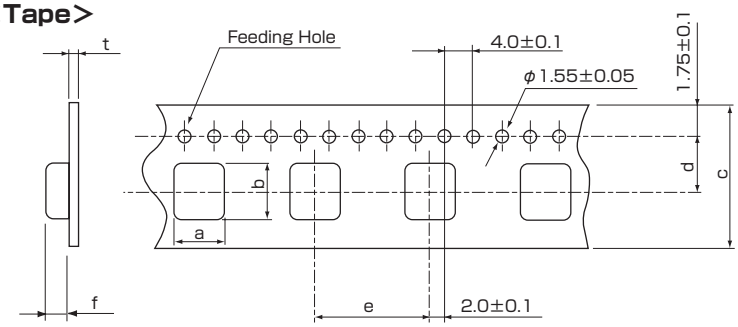

Unit : mm

<Reel>

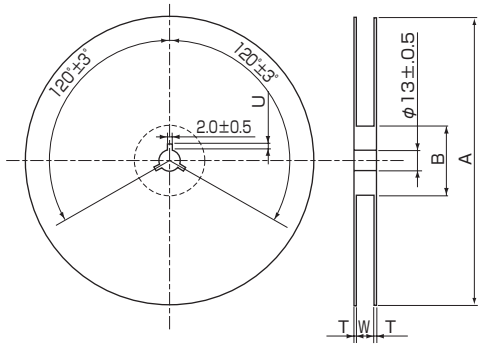

Unit : mm

■ Standard Specification

TYPE	a	b	c	d	e	f	t	A	B	T	U	W
SMD-49	5.0 ±0.1	12.6 ±0.1	24.0 ±0.3	11.5 ±0.1	8.0 ±0.1	5.1 ±0.1	0.4 ±0.05	φ330 ±2	φ80 ±1	2.0 ±0.5	4.0 ±1.0	25.5 ±1.5
SMD-49TA SMD-49TB	↑	↑	↑	↑	↑	3.0 ±0.1	↑	↑	↑	↑	↑	↑
DMX-38	5.3 ±0.1	13.4 ±0.1	↑	↑	↑	5.5 ±0.1	↑	↑	↑	↑	↑	↑
DMX-26	5.55 ±0.1	9.3 ±0.1	16.0 ±0.3	7.5 ±0.1	↑	3.4 ±0.1	0.3 ±0.05	↑	↑	↑	↑	17.5 ±1.5
DMX-26S	4.1 ±0.1	8.5 ±0.1	↑	↑	↑	2.7 ±0.1	↑	↑	↑	↑	↑	↑
SM-14J	2.2 ±0.1	7.3 ±0.1	↑	↑	4.0 ±0.1	1.6 ±0.1	↑	↑	↑	↑	↑	↑
SM-26F	4.0 ±0.1	9.5 ±0.1	↑	↑	8.0 ±0.1	2.25 ±0.1	↑	↑	↑	↑	↑	↑
DSX151G SERIES	5.9 ±0.1	12.4 ±0.1	24.0 ±0.3	11.5 ±0.1	12.0 ±0.1	2.8 ±0.1	↑	↑	↑	1.6 ±0.5	↑	22.4 +2/-0
DSX840GA DSX840GK/GT	5.05 ±0.1	8.5 ±0.1	16.0 ±0.3	7.5 ±0.1	8.0 ±0.1	2.25 ±0.1	↑	φ254 ±2	φ100 ±1	2.0 ±0.5	4.0 ±0.8	17.5 ±1.5
DSX630G	4.0 ±0.1	6.5 ±0.1	12.0 ±0.3	5.5 ±0.05	↑	1.7 ±0.1	↑	φ180 ±2	φ80 ±1	↑	↑	13.5 ±1.5
DSX631S	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑	↑
DSX530GA	3.6 ±0.1	5.45 ±0.1	12.0 ±0.2	↑	↑	1.55 ±0.1	↑	↑	↑	2.0 ±0.5	↑	↑
DSX531S	3.5 ±0.1	5.30 ±0.1	↑	5.5 ±0.1	↑	1.0 ±0.1	↑	↑	φ60 ±1	1.2 ±0.5	4.0 ±1.0	13.0 ±1.5
DSX321G	2.8 ±0.1	3.50 ±0.1	8.00 ±0.2	3.5 ±0.05	4.0 ±0.1	↑	0.25 ±0.05	φ180 +0/-3.0	φ60 +1.0/-0	↑	4.0 ±0.8	9.0 ±1.5
DSX321SL	↑	↑	↑	↑	↑	0.75 ±0.1	↑	↑	↑	↑	↑	↑
DSX221G	2.3 ±0.1	2.8 ±0.1	↑	3.5 ±0.1	4.0 ±0.1	1.0 ±0.1	0.20 ±0.05	↑	↑	↑	↑	9.0 ±0.3
DSX221S	↑	↑	↑	↑	↑	0.75 ±0.1	0.25 ±0.05	↑	↑	↑	↑	9.0 ±1.5
DST621	2.7 ±0.1	6.2 ±0.1	12.0 ±0.3	5.5 ±0.05	↑	1.2 ±0.1	↑	φ180 ±2	φ60 ±1	↑	4.0 ±1.0	13.0 ±1.5
DST520	2.1 ±0.1	5.0 ±0.1	12.0 ±0.2	5.5 ±0.1	↑	1.0 ±0.1	0.3 ±0.05	φ180 ±2	↑	↑	↑	↑
DST410S	1.9 ±0.1	4.5 ±0.1	↑	↑	↑	1.05 ±0.05	↑	φ180 +0/-3.0	↑	↑	↑	↑
DST310S	↑	↑	↑	↑	↑	1.05 ±0.1	↑	φ180 +0/-3.0	φ60 +1.0/-0	↑	↑	9.0 ±0.3

※1: To indicate product name and other information, place such information in a label, and affix the label on one side of the flange.
2: The taping dimensions should be as per EIAJ RC-1009B. 1,000 units should be packaged per reel.
3: The standard packaged quantity per reel is 2,000 units for SMD-49TA/TB, 5,000 units for SM-14J, and 3,000 units for DST621.
4: The standard packaged quantity per reel is 2,500 per DMX -26, DMX-26S, and SM-26F.
5: For DMX-38, DMX-26 and DST621, the connecting pins of the resonator are located on the sprocket-hole side of the tape.
6: For DSX631S and DSX531S pin No. 1 is located on the sprocket-hole side of the tape.
7: For other models, the insertion direction is not specified.