TXC CORPORATION

4F, NO. 16, Sec. 2 Chung Yang S Rd., Peitou, Taipei, Taiwan.

TEL : 886-2-2894-1202 , 886-2-2895-2201 FAX : 886-2-2894-1206 , 886-2-2895-6207 www.txccorp.com

SPECIFICATION FOR APPROVAL

CUSTOMER	:	
PRODUCT TYPE	:	HC-49/S
NOMINAL FREQ.	:	4.915200MHz
TXC P/N	:	9B04900134
REVISION	:	A2
CUSTOMER P/N	:	
PM / SALES	:	
DATE	:	

CUSTOMER SIGNATURE & Date

(1) TXC requires one copy returned with signature and title of authorized individual that signifies acceptance of the attached specifications.

(2) Orders received and accepted by TXC after return of signed copy of specification will be produced per these specifications.

(3) Any changes to these specifications must be agreed upon by both parties and new revision of the Product Specification Sheet will be issued.

(4) Any issuance of purchase order prior to consigning back the Approval page of "Specification Sheets" from customers will be regarded as the agreement on the contents of these specifications.

Attachment: Product Specification Sheet

1
2
3
4
5

RoHS Compliant

TXC CORPORATION

4F, NO. 16, Sec. 2 Chung Yang S Rd., Peitou, Taipei, Taiwan.

TEL : 886-2-2894-1202 , 886-2-2895-2201 FAX : 886-2-2894-1206 , 886-2-2895-6207 www.txccorp.com

PRODUCT SPECIFICATION SHEET

PRODUCT TYPE	:	HC-49/S
NOMINAL FREQ.	:	4.915200MHz
TXC P/N	:	9B04900134
REVISION	:	A2

PE/RD	QA	MFG
Simon Wang	Tom Hsieh	Shu-Chen Ko
2009/2/3	***2009/2/3***	***2009/2/3***

NOTE:

(1)Lead Free Products are "Directive 2002/95/EC of The European Parliament of 27 January 2003 on the restriction of the use of certain hazardous substances (RoHS) in electrical and electronic equipment" Compliant (Attachment: SGS Test Report).

(2)Revision "Sx" is for engineering samples only. PE/RD's approval required.

(3)Revision "Ax" is production ready. PE, QA and MFG's approval required

RoHS Compliant

Rev	Revise page	Revise contents	Date	Ref.No.	Reviser
A1	N/A	Initial Released	2006/7/17	N/A	Shu-Chen Ko
A2	N/A	Version Change " E "	2009/2/3	ECN-08P112702	Shu-Chen Ko

CONTENT

SPECIFICATIONS	PAGE
• ELECTRICAL SPECIFICATIONS	4
• DIMENSIONS	5
• MARKING	6
• PACKING	7
• RELIABILITY SPECIFICATIONS	8

ATTACHMENT(S) (optional)

TESTING DATA

- ELECTRICAL CHARACTERISTICS TEST — A ☐ YES ☑ NO
- TEMPERATURE CHARACTERISTICS TEST — B ☐ YES ☑ NO

ELECTRICAL SPECIFICATIONS

Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurement and tests are as follow:

Ambient temperature : 25+/-5°C

Relative humidity : 40%~70%

If there is any doubt about the results, measurement shall be made within the following limits:

Ambient temperature : 25+/-1°C


Relative humidity : 40%~70%

Measure equipment

SAUNDERS 250A/250B CRYSTAL IMPEDANCE METER.

Crystal cutting type

The crystal is using AT CUT (thickness shear mode).

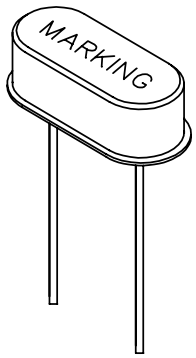


please refer to marking code page

1.	Nominal Frequency	4.915200 MHz
2.	Oscillation Mode	Fundamental
3.	Load Capacitance	20.0 pF
4.	Frequency Tolerance (25 °C)	+/- 30 ppm
5.	Effective Series Resistance	100 Ohms Max.
6.	Shunt Capacitance (C0)	7.0 pF Max.
7.	Motional Capacitance (C1)	N/A fF
8.	Drive Level	100 uW Typ.
9.	Operation Temperature Range	-10 °C ~ +60 °C
10.	Stability Over Temperature Range	+/- 30 ppm (related to 25 °C)
11.	Insulation Resistance	500 MOhms Min. at DC 100V
12.	Attenuation of Spurious Frequency Amplitude	N/A
13.	Ratio of Holder to Motional (C0/1)	N/A
14.	Storage Temperature	-40 °C ~ +85 °C
15.	Aging	+/- 5.0 ppm / year.
16.	Weight	0.54 g +/- 0.05g


DIMENSIONS

UNIT:mm

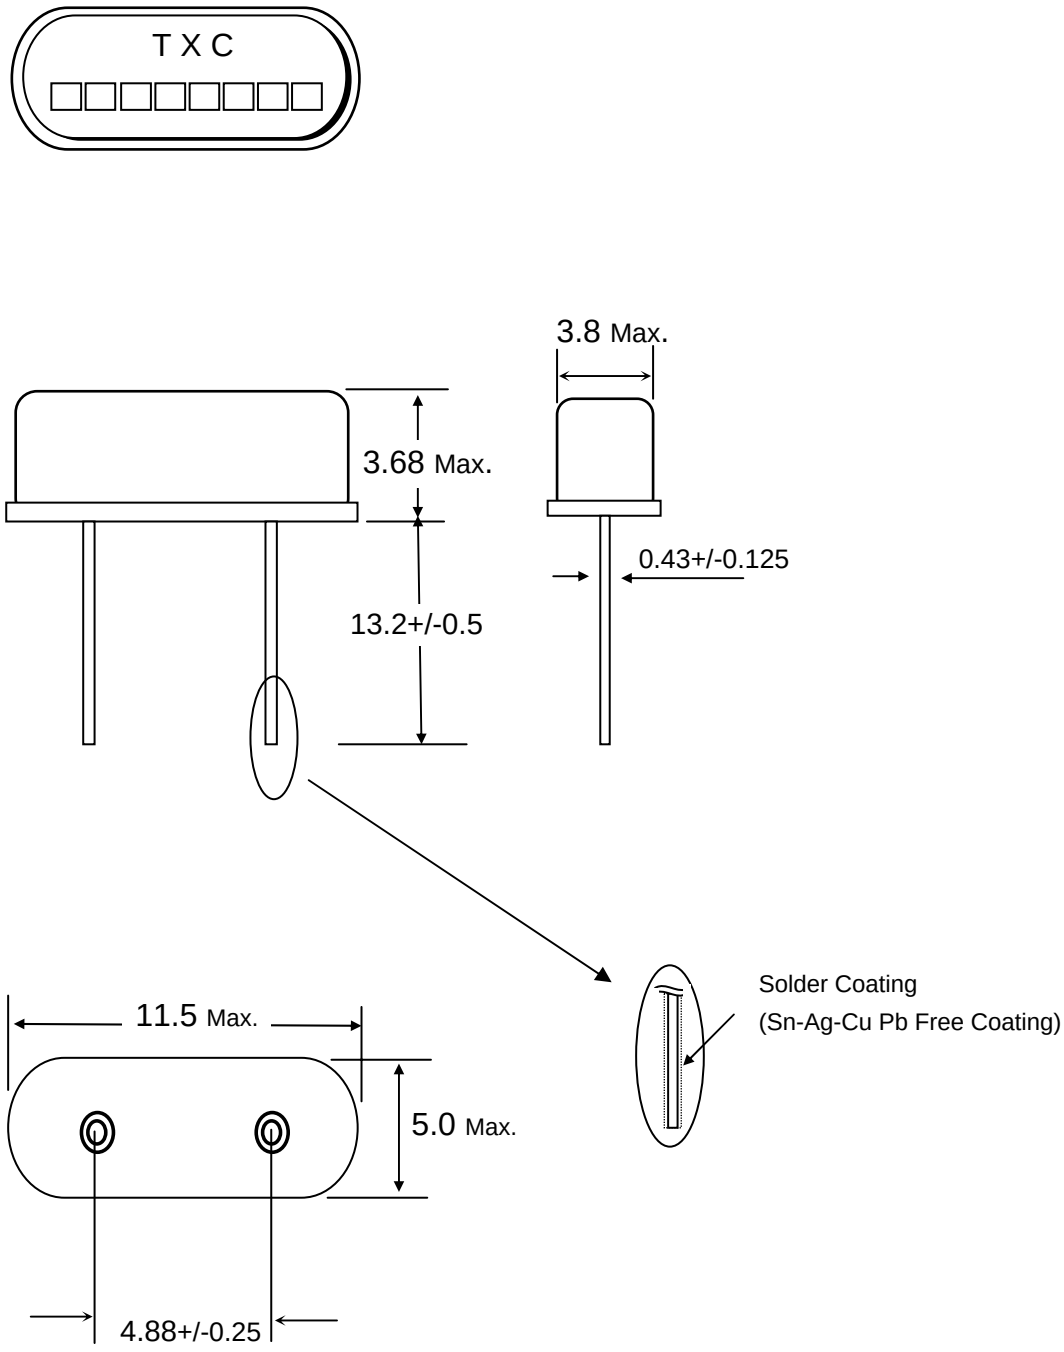

MARKING

Marking For Pb Free Parts：

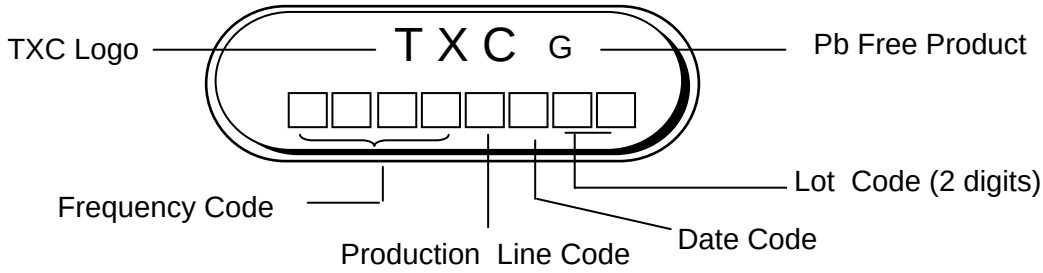


Date Code:

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2005 2009 2013 2017 2021	A	B	C	D	E	F	G	H	J	K	L	M
2006 2010 2014 2018 2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2007 2011 2015 2019 2023	a	b	c	d	e	f	g	h	j	k	l	m
2008 2012 2016 2020 2024	n	p	q	r	s	t	u	v	w	x	y	z

*This date code will be cycled every four years.

For example： Marking

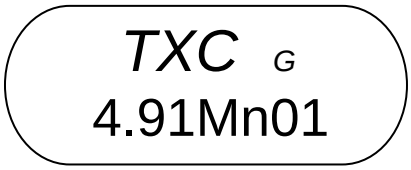


→

Introduction： Pb Free Product
49S 4.9152 MHz
Made in 2008/JAN. 01Lot


Packing For Pb Free Parts ：

1.INNER BOX：(Unit：mm)


5bagx200pcs
=1000pcs/box

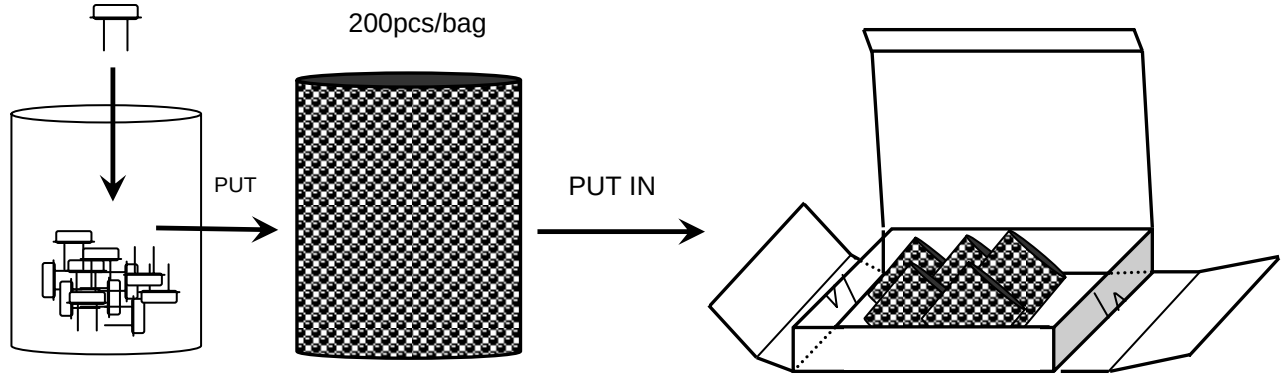


2.LOGO STICKER(CARTON and INNER BOX)：(Unit：mm)

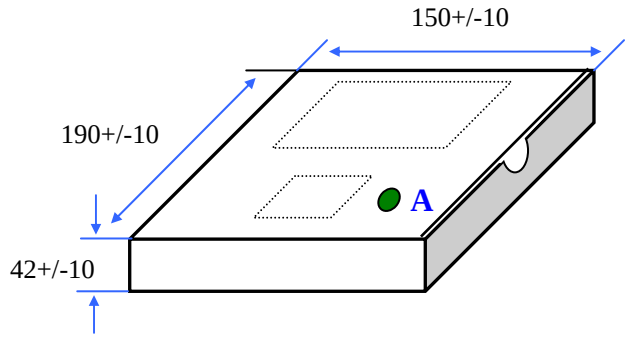

PUT IN

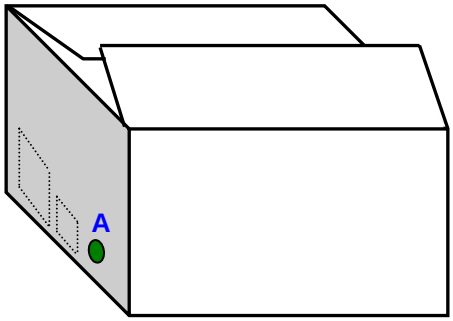

Label A




(1) Put in stuff between space.
(2) Tie Up the Carton with 4 Packthreads.
(3) "G" ： Pb-Free Product

■ RELIABILITY SPECIFICATIONS

1.Mechanical Endurance

No.	Test Item	Test Methods	REF.DOC
1.1	Drop Test	50 cm height, fall freely onto firm wood for 3 times.	JIS C6701
1.2	Mechanical Shock	Device are shocked to half sine wave (1000 G) three mutually pendicular axes each 3 times. 0.5m sec. duration time	MIL-STD-202F
1.3	Vibration	Frequency range 10 ~ 55 Hz Amplitude 1.52 mm Sweep time 1 minute Pendicular axes each test time 2 hours (Total test time 6 hours)	MIL-STD-883E
1.4	Gross Leak	125°C FC#40 ,120 Seconds.	MIL-STD-883E
1.5	Fine Leak	Helium Bombing 5 Kg/ cm^2 for 2 hr	
1.6	Solderability	Temperature 235 °C +/- 5°C Immersing depth 0.5 mm minimum Immersion time 5 +/- 0.5 seconds Flux Rosin resin methyl alcohol solvent (1 : 4)	MIL-STD-883E

2.Environmental Endurance

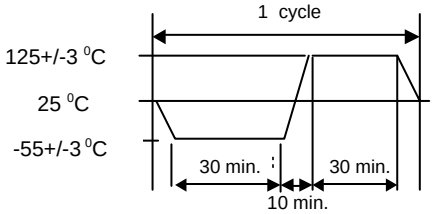No.	Test Item	Test Methods	REF.DOC
2.1	Resistance To Soldering Heat	Test Temperature 260 °C +/- 5 °C Test Time 10 +/- 1 sec. (Solder Pot)	MIL-STD-202F
2.2	High Temp. Storage	+ 125 °C +/- 2 °C for 500 +/- 12 hours	MIL-STD-883E
2.3	Low Temp. Storage	- 40 °C +/- 2 °C for 500 +/- 12 hours	
2.4	Thermal Cycles	Total 100 cycles of the following temperature cycle 	MIL-STD-883E
2.5	High Temp&Humidity	Device are left in temperature at +85 °C +/-2 °C with relative humidity of 85% for 500 hours.	JIS-C-5023

* Measure in room temperature after each tests.