TXC CORPORATION

www.txccorp.com

SPECIFICATION FOR APPROVAL

CUSTOMER	:	
PRODUCT TYPE	:	SMD XTAL 2.0 × 1.6
NOMINAL FREQ.	:	96.000000MHz
TXC P/N	:	8Y96000001
REVISION	:	S3
CUSTOMER P/N	:	
PM / SALES	:	
DATE	:	
CUSTOMER CONFIRMATION	:	(Singnature)
		(Date)

(1) TXC requires one copy returned with signature and title of authorized individual that signifies acceptance of the attached specifications.

(2) Orders received and accepted by TXC after return of signed copy of specification will be produced per these specifications.

(3) Any changes to these specifications must be agreed upon by both parties and new revision of the Product Specification Sheet will be issued.

(4) Any issuance of purchase order prior to consigning back the Approval page of "Specification Sheets" from customers will be regarded as the agreement on the contents of these specifications.

MSL:Level 1

RoHS Compliant

(for glass crystal only：Pb used in sealing glass material is exempt from EU directive)

TXC confidential and proprietary document

TXC CORPORATION

www.txccorp.com

PRODUCT SPECIFICATION SHEET

PRODUCT TYPE	:	SMD XTAL 2.0 × 1.6
NOMINAL FREQ.	:	96.000000MHz
TXC P/N	:	8Y96000001
REVISION	:	S3

PE/RD	QA	MFG
Mike Chiu		
21-Sep-18		

NOTE:

(1) The green product standard set by TXC is based upon the international standards. Related information is publicly described on the TXC's Website, and updated regularly. The document is compliant with the latest green product quality system directives at the time.

(2) Revision "Sx" is for engineering samples only. PE/RD's approval required.

(3) Revision "Ax" is production ready. PE, QA and MFG's approval required.

MSL:Level 1
RoHS Compliant

(for glass crystal only：Pb used in sealing glass material is exempt from EU directive)

TXC confidential and proprietary document

Rev	Revise page	Revise contents	Date	Ref.No.	Reviser
S1	N/A	Initial released	25-Oct-17	N/A	Yachuan Miao
S2	2	Change Frequency Tolerance	8-Dec-17	PNR17120614	Yachuan Miao
S3	2	Change Frequency Tolerance	21-Sep-18	PNR18092001	Yachuan Miao

TXC confidential and proprietary document

■ ELECTRICAL SPECIFICATIONS

Standard atmospheric conditions

Unless otherwise specified, the standard range of atmospheric conditions for making measurement and tests are as follow:

Ambient temperature : 25±10℃

Relative humidity : 40%~70%

If there is any doubt about the results, measurement shall be made within the following limits:

Ambient temperature : 25±3℃

Relative humidity : 40%~70%

Measure equipment

Electrical characteristics measured by S&A 250B or equivalent.

Crystal cutting type

The crystal is using AT CUT (thickness shear mode).

Unit Weight:


0.006±0.001 g/pcs

	Parameters	Symbol	Electrical Spec.				Notes
			Min.	Typ.	Max.	Units	
1	Norminal Frequency	FL		96.000000		MHz	-
2	Oscillation Mode	-		Fundamental		-	-
3	Load Capacitance	CL		9.9		pF	IEC standard 60444-8 using Agilent 41901A Pi Circuit
				9.9			Saunders (S&A) Network Analyzer 250 B
				8			π network + Network Analyzer E5100A
4	Frequency Tolerance	-		±12		ppm	at 25 ℃ ± 3 ℃
5	Tolerance over temperature	-		±20		ppm	-40℃~105℃
	Frequency perturbation						-40℃~105℃
	Aging						10 Years.
6	Operating Temperature	-	-40	~	105	℃	-
7	Drive Level	DL	0.01	100	300	uW	-
8	Equivalent Series Resistance	ESR	8	-	20	Ω	-
9	Shunt Capacitance C0	C0	0.5	0.8	1.3	pF	-
10	Motional Capacitance C1	C1	2.0	2.5	4.2	fF	-
11	Insulation Resistance	-	500	-	-	MΩ	at DC 100V
12	Storage Temperature Range	-	-40	~	105	℃	-
13	Motional Inductance L1	L1	0.5	1	1.2	mH	-
14	Spurious mode series resistance	-	1100	-	-	Ω	±0.1MHz
15	Frequency drift after reflow	-		±2		ppm	After two reflows
16	Quality Factor	Q	10K	-	-	-	
17	Pulling sensitivity	TS	10	~	22	ppm/pF	-
18	DLD2	-	-	-	10	Ohms	-
19	DLDH2	-	-	-	5	Ohms	-
20	SPDB	-	-	-	-5	dB	±5000 ppm of nominal Freq.


TXC confidential and proprietary document

■ DIMENSIONS

(Unit:mm)

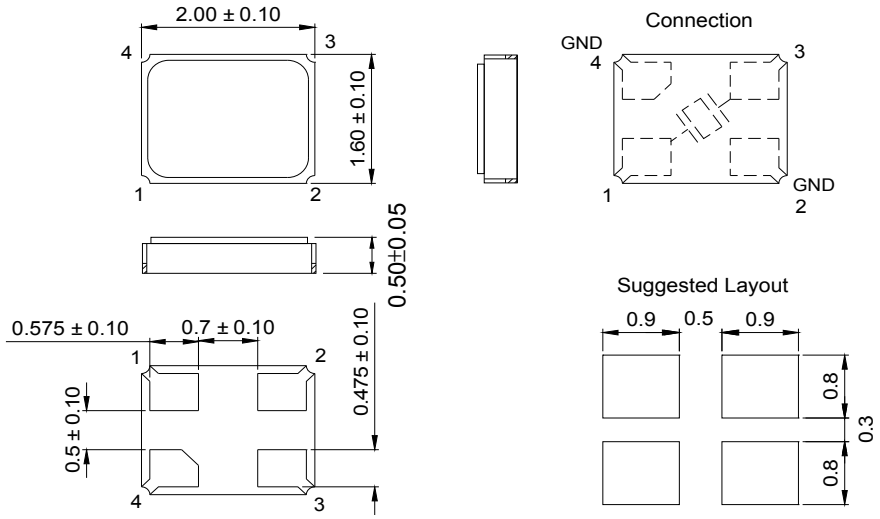

■ MARKING

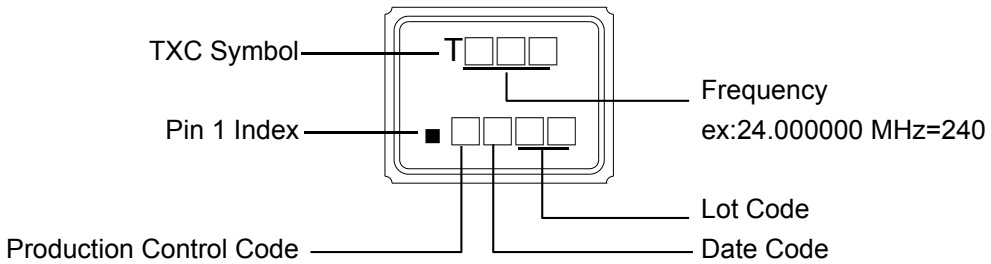

Date Code:

YEAR \ MONTH	JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
2005 2009 2013 2017 2021	A	B	C	D	E	F	G	H	J	K	L	M
2006 2010 2014 2018 2022	N	P	Q	R	S	T	U	V	W	X	Y	Z
2007 2011 2015 2019 2023	a	b	c	d	e	f	g	h	j	k	l	m
2008 2012 2016 2020 2024	n	p	q	r	s	t	u	v	w	x	y	z


*This date code will be cycled every four years

Production location:Taiwan

■ SUGGESTED REFLOW PROFILE


Total time : 200 sec. Max.

Solder melting point :220℃

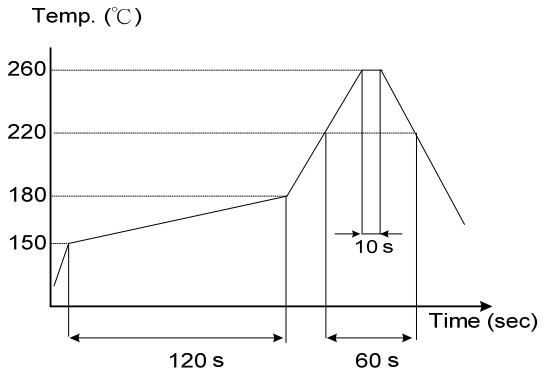

TXC confidential and proprietary document


STRUCTURE ILLUSTRATION

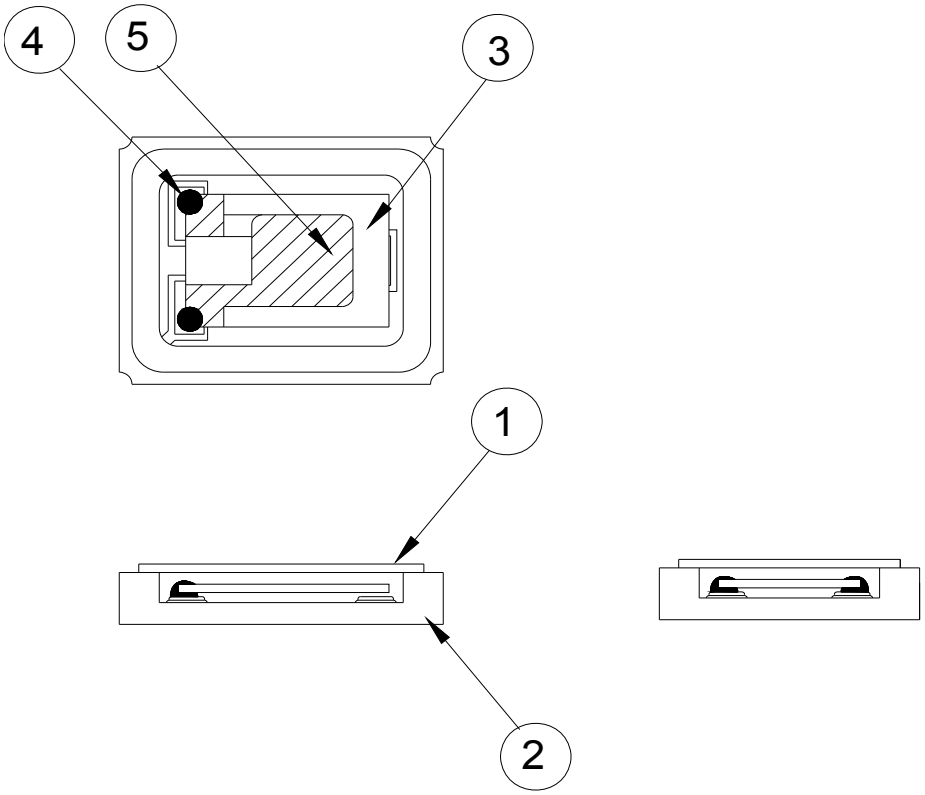

NO	COMPONENTS	MATERIALS	FINISH/SPECIFICATIONS
1	Lid	Kovar	-
2	Base(Package)	Ceramic (Al_2O_3)+Pad(Au)	Alumina ceramics
3	Crystal blank	SiO2	-
4	Conductive adhesive	Ag	Silicone resin
5	Electrode	Noble Metal + Cr	-


TXC confidential and proprietary document


■ EMBOSS CARRIER TAPE & REEL

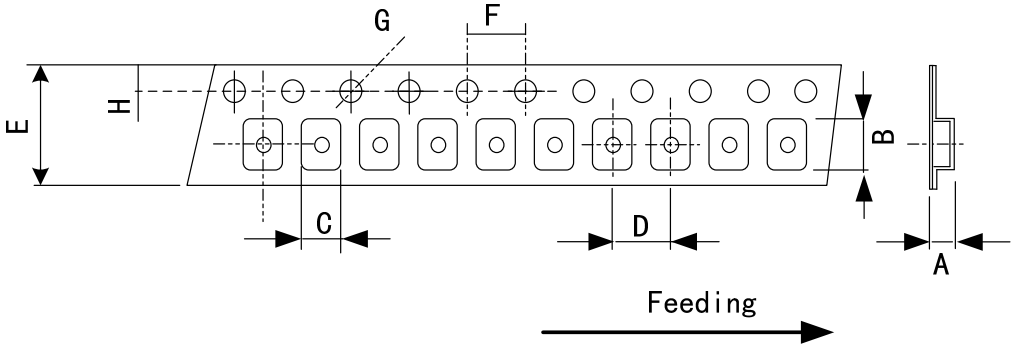

	A	B	C	D	E	F	G	H	
DIMENSIONS	0.90 ±0.10	2.30 ±0.10	1.90 ±0.10	4.00 ±0.10	8.00 ±0.20	4.00 ±0.10	1.55 ±0.05	1.75 ±0.10	(UNIT:mm)

REMARK :

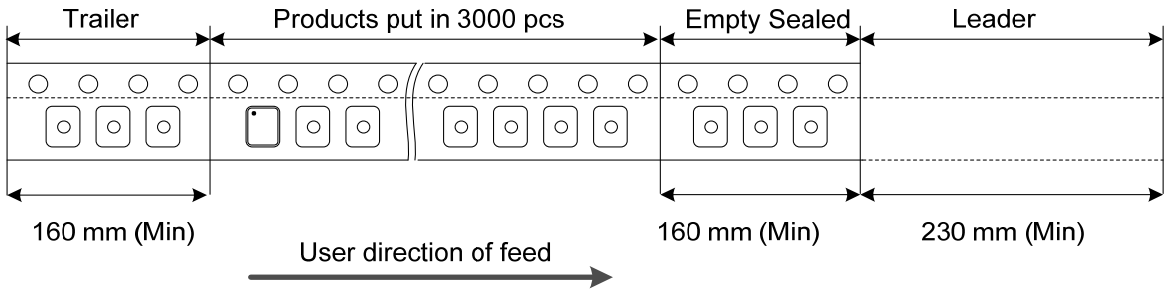

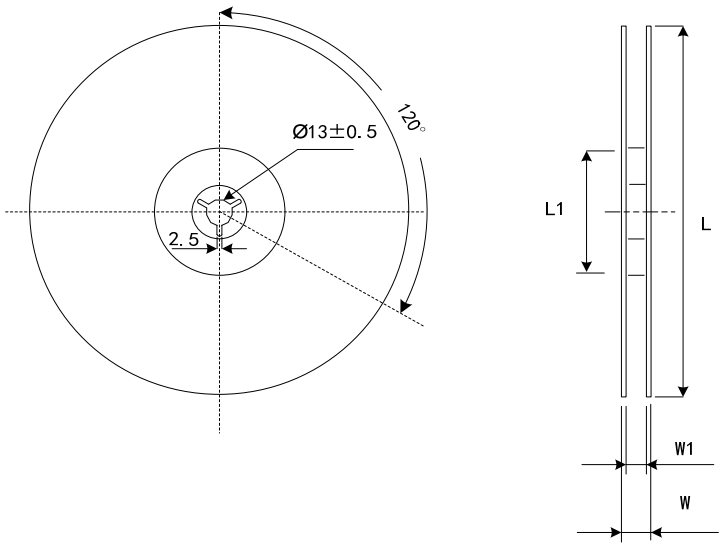

	L	L1	W	W1	
DIMENSIONS	178 ±1.00	60.2 ±0.50	11.5 ±0.2	8 +1/-0	Standard Reel Quantity is 3,000 pcs per reel (UNIT:mm)


TXC confidential and proprietary document

■ RELIABILITY SPECIFICATIONS

1.Mechanical Endurance

No.	Test Item	Test Methods		REF.DOC
1.1	Drop Test	150 cm height, 3 times on concrete floor.		JIS C6701
1.2	Mechanical Shock	Device are shocked to half sine wave (1000 G) three mutually perpendicular axes each 3 times. 0.5m sec. duration time		MIL-STD-202
1.3	Vibration	Frequency range Amplitude Sweep time perpendicular axes each test time	10 ~ 2000 Hz 1.52 mm/20G 20 minutes 4 Hrs (Total test time 12 Hrs)	MIL-STD-883
1.4	Gross Leak	Standard Sample For Automatic Gross Leak Detector, Test Pressure: 2kg / cm^2		MIL-STD-883
1.5	Fine Leak	Helium Bombing 4.5 kg/ cm^2 for 2 Hrs		
1.6	Solder ability	Temperature Immersing depth Immersion time Flux	245 ℃ ± 5℃ 0.5 mm minimum 5 ± 1 seconds Rosin resin methyl alcohol solvent (1 : 4)	MIL-STD-883

2.Environmental Endurance

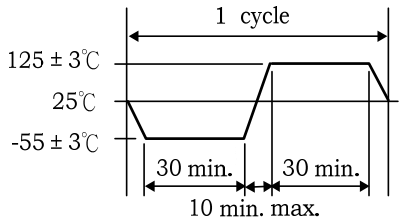No.	Test Item	Test Methods		REF. DOC
2.1	Resistance To Soldering Heat	Pre-heat temperature Pre-heat time Test temperature Test time	125 ℃ 60 ~ 120 sec. 260 ± 5 ℃ 10 ± 1 sec.	MIL-STD-202
2.2	High Temp. Storage	+ 125 ℃ ± 3 ℃ for 500 ± 12 Hrs		MIL-STD-883
2.3	Low Temp. Storage	- 40 ℃ ± 3 ℃ for 500 ± 12 Hrs		
2.4	Thermal Shock	Total 100 cycles of the following temperature cycle 		MIL-STD-883
2.5	High Temp＆Humidity	85℃ ± 3℃, RH 85% , 500 Hrs		EIA-JESD22

TXC confidential and proprietary document