1. Device Name TCXO
2. Model Name DSB211SP
3. Nominal Frequency 40.000 MHz
4. Mass 0.015g max.

5. Absolute Maximum Ratings

	Item	Symbol	Rating	unit
1	Supply Voltage	V_{CC}	-0.3~+4.6	V
2	Storage Temperature Range	$T_{_STG}$	-40~+125	°C

6. Recommended Operating Conditions

	Item	Symbol	min.	typ.	max.	unit
1	Supply Voltage	V_{CC}	+2.97	+3.3	+3.63	V
2	Load Impedance (resistance part)	L_{OAD}_R	9	10	11	kΩ
	(parallel capacitance)	L_{OAD}_C	9	10	11	pF
3	Operating Temperature Range	$T_{_OPR}$	-40	-	+125	°C

7. Electrical Characteristics


(T_A=-40~+125°C, L_{OAD}_R//C=10kΩ//10pF, V_{CC}=+3.3V, unless otherwise noted)

	Item	Conditions	Limits			unit	Notes
			min.	typ	max.		
1	Current Consumption		-	-	+2.0	mA	
2	Output Level		0.8	-	1.2	V_{P-P}	1
3	Symmetry	GND level (DC cut)	45/55	-	45/55	%	
4	Harmonics		-	-	-5	dBc	
5	Frequency Stability 1.Tolerance	After 2 times reflow Ref. to nominal frequency	-	-	±1.5	ppm	2,3
	2.vs Temperature	T_A=-40~+105°C Ref. to frequency (T_A=+25°C)	-	-	±2.0	ppm	
		T_A=+105~+125°C Ref. to frequency (T_A=+25°C)	-	-	±5.0	ppm	
	3.vs Supply Voltage	V_{CC}=+3.3V±10%	-	-	±0.2	ppm	
	4.vs Load Variation	L_{OAD}_R//C=(10kΩ//10pF)±10%	-	-	±0.2	ppm	
	5.vs Aging	T_A=Room ambient	-	-	±1.0	ppm/year	
			-	-	±2.0	ppm/5years	
			-	-	±3.0	ppm/10years	
6	Start Up Time	@90% of final Vout level	-	-	2.0	ms	
7	SSB Phase Noise	Relative to f0 level offset 1kHz	-	-138	-132	dBc/Hz	
		Relative to f0 level offset 10kHz	-	-155	-150	dBc/Hz	
		Relative to f0 level offset 100kHz	-	-159	-155	dBc/Hz	
		Relative to f0 level offset 1MHz	-	-159	-155	dBc/Hz	

Notes
1. Clipped sine wave (DC-coupled)
2. T_A=+25°C
3. Please leave after reflow in 2h or more at room ambient.

8. Outline, Pin Connections

Outline

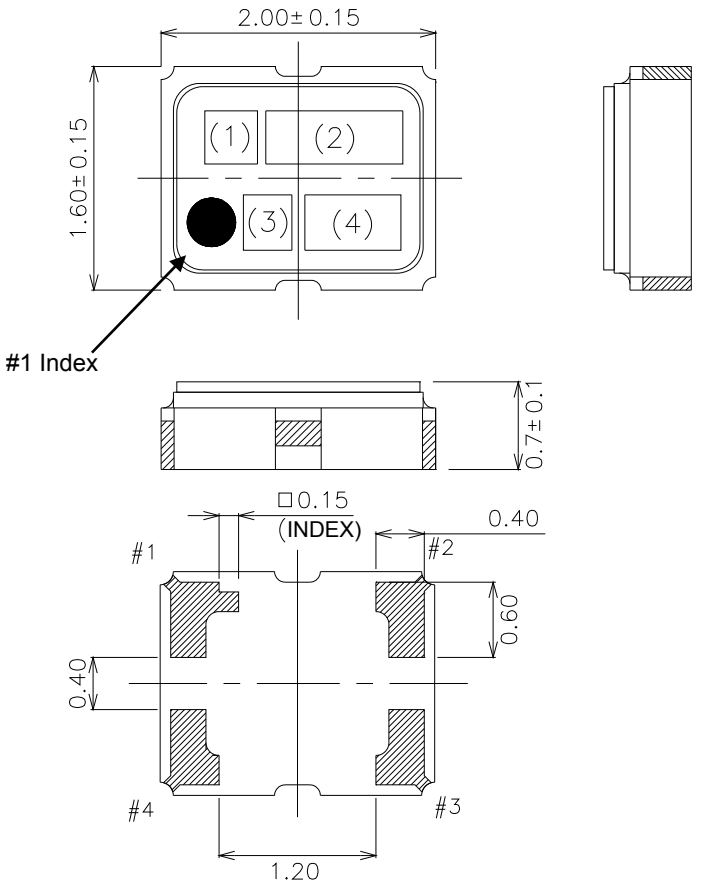

Pin Connections


Pin No.	Connection
#1	GND
#2	GND
#3	Output
#4	V_{CC}

Marking

(1) Model code	BP
(2) Frequency	40.0 (MHz, 3digits)
(3) Logo	D
(4) Date code	Year (1digit) +Week (2digits) e.g.2016/1/1 → 601

unit: mm
Dimensional Tolerance: ±0.1
(Unless otherwise noted)

9. Measurement Circuit

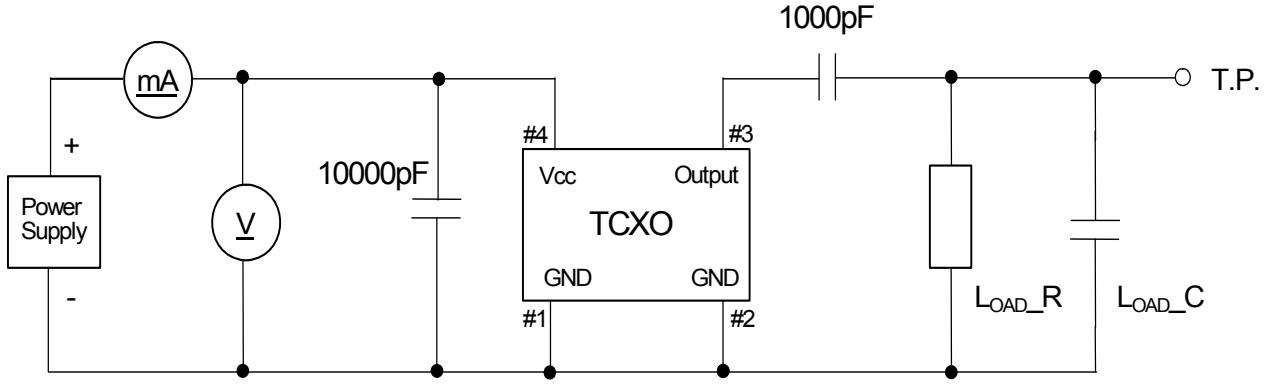

L_{OAD}_R=10kΩ
L_{OAD}_C=10pF (Include Jig stray capacitance)

TITLE	Remark		
DSB211SP TYPE SPECIFICATION	ZT70917		
Date	Spec. No.	Rev.	Page
2016/03/31	1XXD40000NAA	-	2/2