Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of CSTCE10M0G52Z-R0 from the official website of Murata
https://pim.murata.com/en-eu/pim/details/?partNum=CSTCE10M0G52Z-R0

CSTCE10M0G52Z-R0

Discontinued

CSTCE10M0G52Z-R0

RoHS REACH

Last Time Order Due	End of Production	Alternative Products
30/09/2019	31/03/2020	>CSTNE10M0G52Z000R0

Applications

Unsuitable Applications	Please be sure to read and comply with these "Precautions for use".
Specific Applications	Consumer equipment Please refer to Our Website and specifications, etc. for information about the performance, functions, quality, management, and safety required for the above applications, and use Products after confirming the performance and reliability of the actual Product.


Attention
1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of CSTCE10M0G52Z-R0 from the official website of Murata
https://pim.murata.com/en-eu/pim/details/?partNum=CSTCE10M0G52Z-R0

CSTCE10M0G52Z-R0

Appearance & Shape



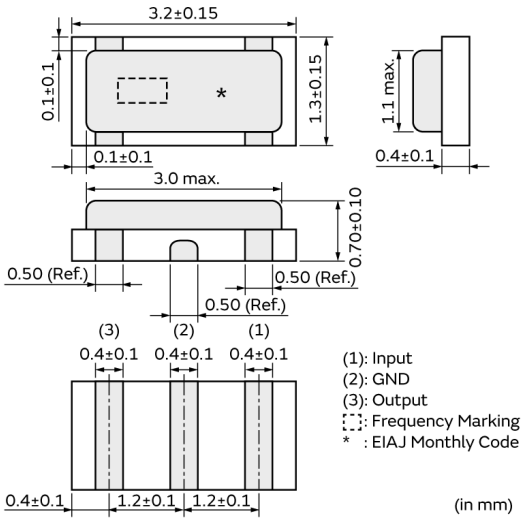

L x W (size)	3.2×1.3mm

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of CSTCE10M0G52Z-R0 from the official website of Murata
https://pim.murata.com/en-eu/pim/details/?partNum=CSTCE10M0G52Z-R0

CSTCE10M0G52Z-R0

Specifications

Series	CSTCE_G
Frequency	10.000MHz
Frequency Tolerance	±0.50%
Operating Temperature	-40～125℃
Frequency Shift by Temperature	±0.2%
Frequency Aging	±0.1%
ESR/R1	40Ω
Shape	SMD
Product Type	Ceramic Resonator (CERALOCK)
Wash	Not available

Attention
1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.
Please download the latest datasheet of CSTCE10M0G52Z-R0 from the official website of Murata
https://pim.murata.com/en-eu/pim/details/?partNum=CSTCE10M0G52Z-R0

CSTCE10M0G52Z-R0

Features

MURATA's package technology expertise has enabled the development of the Chip CERALOCK.
High-density mounting is made possible by the small package and the elimination of the need for an external load capacitor.

Features

1. Oscillation circuits do not require external load capacitors.
2. Available for a wide frequency range.
3. Extremely small and have a low profile.
4. No adjustment is necessary for oscillation circuits.
5. Available for a wide temperature range.

References

Packaging	Specifications	Standard Packing Quantity
R0	180mm Embossed Tape	3000

Mass(Typ.)	
1 piece	11mg

Attention
1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2. This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.